



## DETAIL & SUBMITTAL SHEET



**NEW! Gate lock**  
Standard on all Bil-Guard Hatch Railing Systems. Automatically latches gate in the closed position



**Self-Closing Gate Hinge**  
Continuous protection




**Pivoting Mounting Sleeve**  
For installation flexibility

### SPECIFICATIONS:

Provides a permanent means of fall protection for roof hatch openings. Meets and exceeds OSHA fall protection regulations (29 CFR 1910.23). Bil-Guard® models are available for most roof hatch and automatic fire vent sizes.

- Posts and rails are pultruded from a fire retardant, fiber-glass-reinforced polymer (FRP)
- FRP material has a molded-in, high visibility, safety yellow color and is treated with a UV inhibitor.
- Mounting brackets are fabricated from 1/4" thick hot dip galvanized steel.
- Gate hinges and post guides are constructed of 6063-T5 aluminum and torsion rod is type 302 stainless steel.
- All fasteners are type 316 stainless steel.
- Hatch rail system satisfies the requirements of OSHA 29 CFR 1910.23 and meets OSHA strength requirements with a safety factor of two.
- 25-year warranty against defects in material and workmanship.

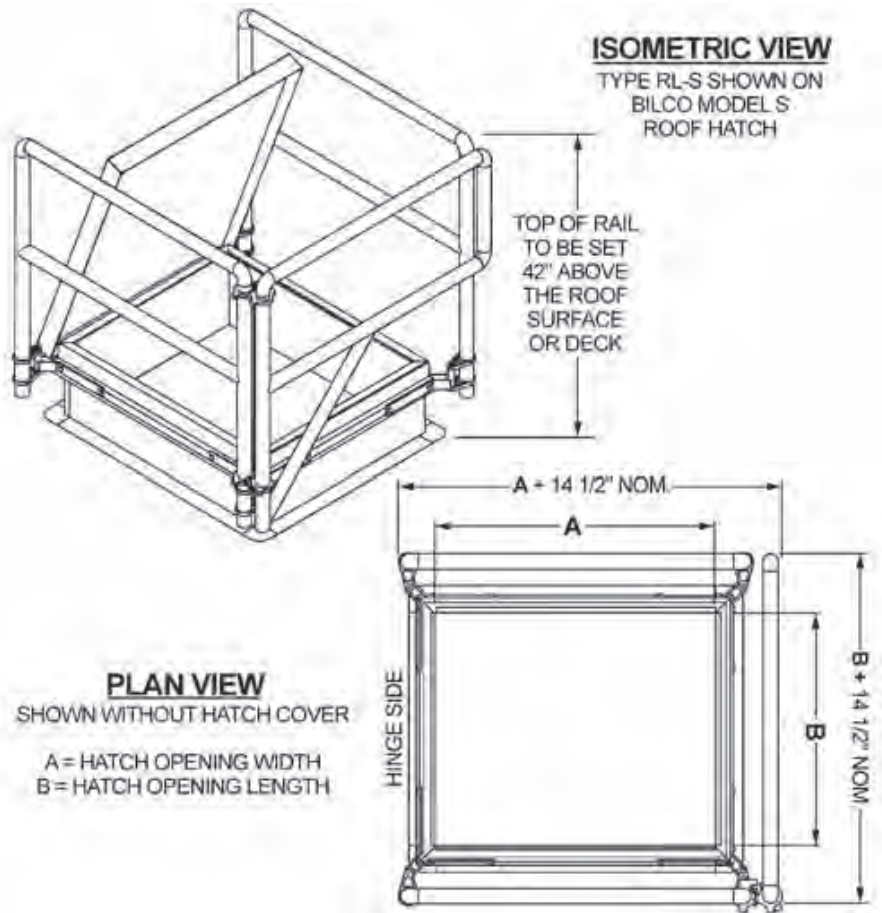

| ✓ | Item No. | Size in Inches | Ship Wt. Lbs. |
|---|----------|----------------|---------------|
|   | RL-S     | 36 x 30        | 52            |
|   | RL-E     | 36 x 36        | 52            |
|   | RL-F     | 48 x 48        | 61            |
|   | RL-NB    | 30 x 54        | 60            |
|   | RL-L     | 30 x 96        | 76            |

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ Approval Initials: \_\_\_\_\_



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630  
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

[www.wbdoors.com](http://www.wbdoors.com)