



WB Fire Rated Access Doors

FR 800 and FRU 810 SERIES

- **FR 800 and FRU 810:** 18 ga. steel door, 16 ga. trim with anchor straps. Largest size acceptable is up to and including 24" x 36"
- **Both:** Latch is a self-closing assist slam catch with interior release spring closure
- **Both:** ThermaFiber® Industrial Felt insulation for optimal fire protection and superior sound control
- **Both:** Pivot rod hinge allows door opening of 140°
- **FR 800:** Standard Knurled Knob and 1 flush key
- **FRU 810:** ULTRA paddle latch with WB 151 key cylinder lock

FR 710 HEAVY DUTY SECURITY DOOR


- 14 ga. steel door and 16 ga. frame with anchor straps
- The trim is laser cut from one sheet of cold rolled steel
- The oversized door panel and the inside door stop acts as a double fire stop safety edge
- 1 piece semi-concealed piano hinge allows for 180° opening
- Trim has a built in safety edge for greater access safety

Standard Accessories:

- Anchor straps standard on all fire-rated doors
- ThermaFiber® Industrial Felt insulation for optimal fire protection and superior sound control

Optional Accessories:

- Mortise Best Lock or locks by others
- **HOT Smoke Seal** fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 105, UBC 7-2, Part 2, and BS476:Part 31, Section 31.1:1983.

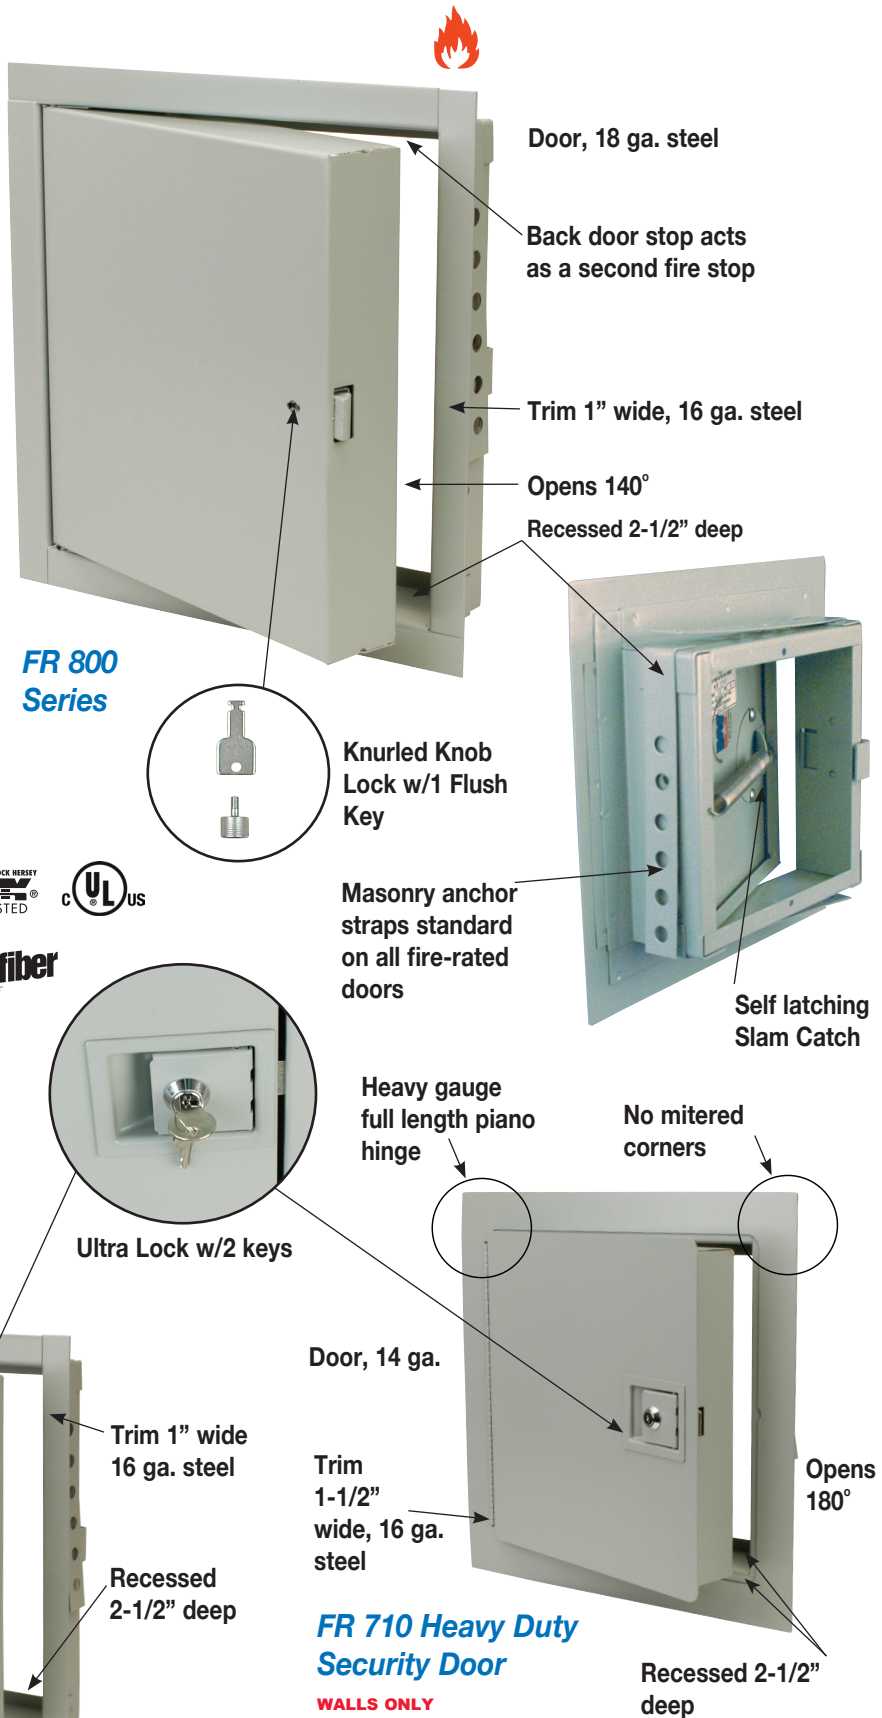

FR 800 Series



FRU 810 Series

FR 710 Heavy Duty Security Door

WALLS ONLY