

## DETAIL & SUBMITTAL SHEET



by Bilco

### SPECIFICATIONS:

#### Material:

**Steel:** Cover and frame are 14 ga. G-90 paint bond galvanized steel

**Aluminum:** Cover and frame are 11 ga. aluminum

**Stainless Steel:** Cover and frame are 14 ga. Type 304 stainless steel

**Cover:** Breakformed, hollow-metal design with 1" concealed fiberglass insulation, 3" beaded, overlapping flange

**Curb:** 12" in height with integral capflashing, 1" fiberboard insulation

**Gasketed:** Extruded EPDM rubber gasket permanently adhered to cover

**Hinges:** Heavy-duty pintle hinges with 3/8" Type 316 stainless steel hinge pins

**Latch:** Slam latch with interior and exterior turn handles and padlock hasps

**Lift Assistance:** Compression spring operators enclosed in telescopic tubes

#### Finish:

**Steel:** Alkyd base red oxide primer

**Aluminum:** Mill finish

**Stainless Steel:** Type 304 stainless steel with sandblast finish

#### Hardware:

**Steel:** Engineered composite compression spring tubes. Steel compression springs with electrocoated acrylic finish. All other hardware is zinc plated/chromate sealed


**Aluminum:** Engineered composite compression spring tubes. Steel compression springs with electrocoated acrylic finish. Type 316 stainless steel hinges. All other hardware is zinc plated/chromate sealed

**Stainless Steel:** Type 316 stainless steel.


### OPTIONS: (AT EXTRA COST)

- WB Safety Grab
- WB Safety Post
- Railing Ready
- Special sizes available upon request

### FRONT ELEVATION

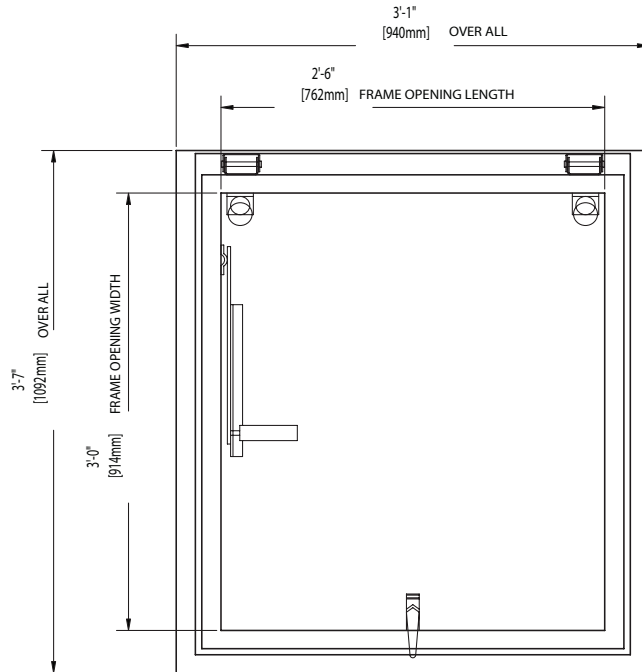

### SECTION DETAIL

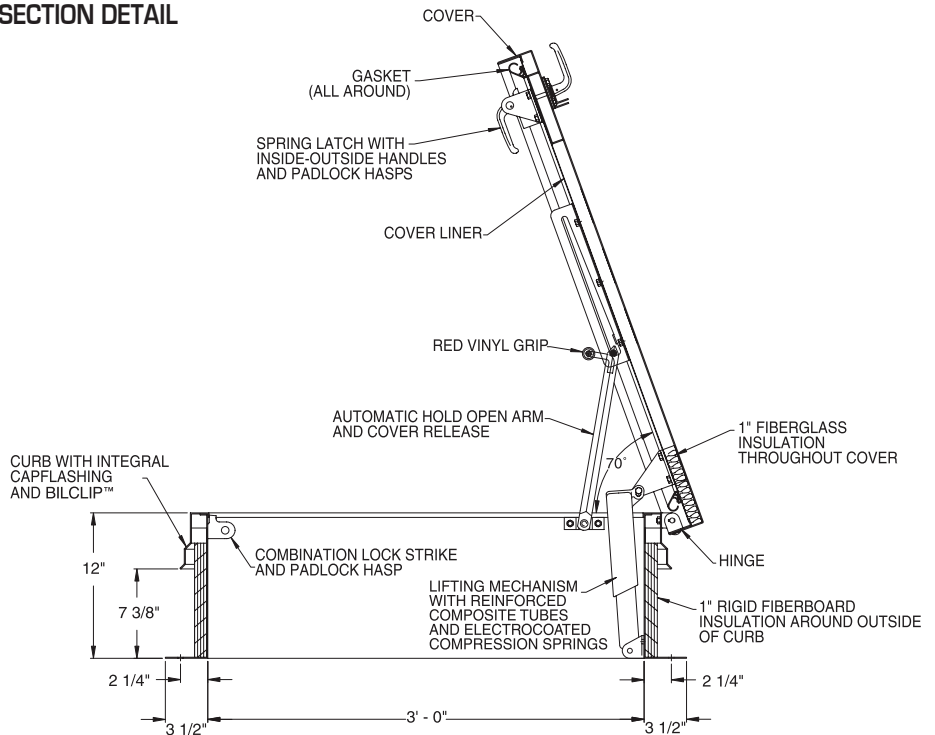

Item No.	Door Size W x H	Material	Ship Wt. Lbs.
✓ S 20	36 x 30	Steel*	183
S 50	36 x 30	Aluminum*	110
E 20	36 x 36	Steel	207
E 50	36 x 36	Aluminum	117

\* Stock item

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ Approval Initials: \_\_\_\_\_



Phone: 1-800-255-5515 • Fax: 1-800-822-5001

[www.wbdoors.com](http://www.wbdoors.com)