

DETAIL & SUBMITTAL SHEET



by Bilco

SPECIFICATIONS:

Material:

Steel: Cover and frame are 14 ga. G-90 paint bond galvanized steel

Aluminum: Cover and frame are 11 ga. aluminum

Cover: Breakformed, hollow-metal design with 1" concealed fiberglass insulation, 3" beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m²) live load

Gasket: Extruded EPDM rubber gasket permanently adhered to the cover

Hinges: Heavy-duty pintle hinges with 3/8" Type 316 stainless steel hinge pins

Latch: Positive hold/release mechanism controlled by a single UL-listed 165°F (74°C) fusible link. Designed to hold the cover closed against a 90 psf (438 kg/m²) uplift force.

Performance Rating: Comply with UL 790 Class A (burning brand test)

Finish:

Steel: Alkyd base red oxide primer

Aluminum: Mill finish

Hardware:


Steel: Engineered composite compression spring tubes. Steel compression springs with electrocoated acrylic finish. All other hardware is zinc plated/chromate sealed.

Aluminum: Engineered composite compression spring tubes. Steel compression springs with electrocoated acrylic finish. Type 316 stainless steel hinges. All other hardware is zinc plated/chromate sealed.


OPTIONS: (AT EXTRA COST)

- WB Safety Grab
- WB Safety Post
- Railing Ready
- Special sizes available upon request

FRONT ELEVATION

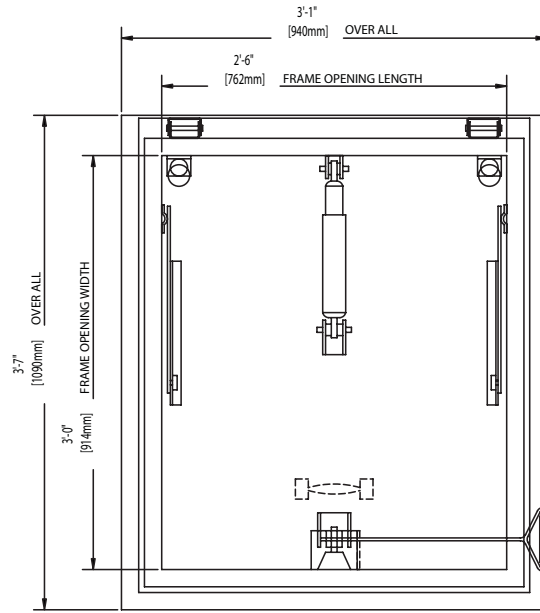

SECTION DETAIL

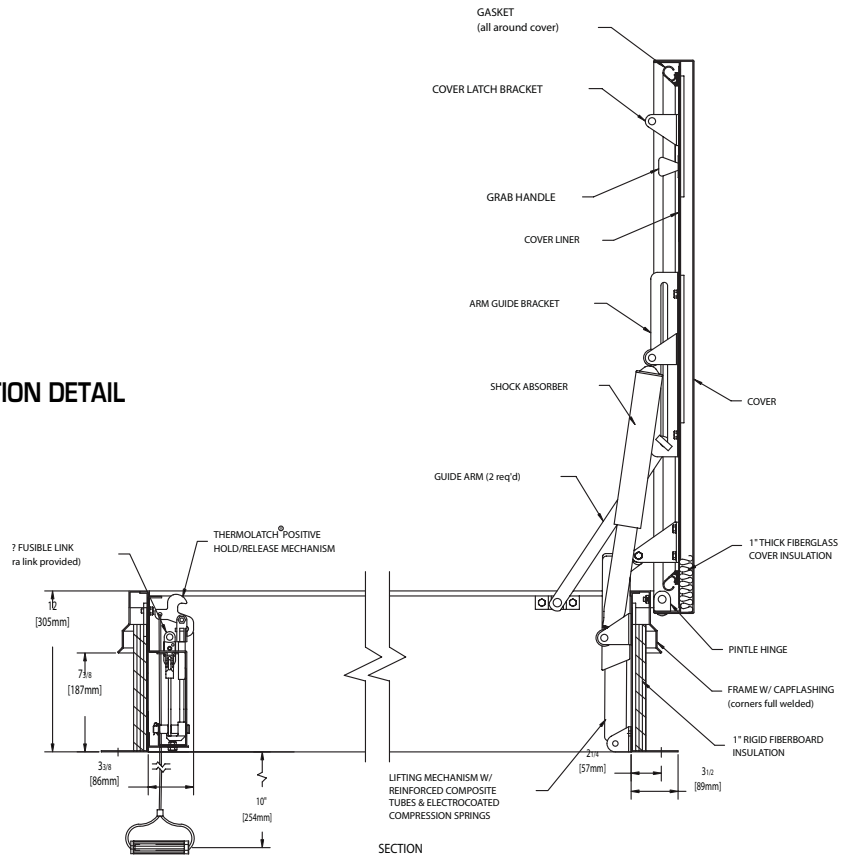

Item No.	Door Size W x H	Material	Ship Wt. Lbs.
S 20SV	36 x 30	Steel	193
NB 20SV	30 x 54	Steel	260
L 20SV	30 x 96	Steel	423
S 40SV	36 x 30	Stl Curb/Al Cvr	160
NB 40SV	30 x 54	Stl Curb/Al Cvr	215
L 40SV	30 x 96	Stl Curb/Al Cvr	315
S 50SV	36 x 30	Aluminum	112
NB 50SV	30 x 54	Aluminum	155
L 50SV	30 x 96	Aluminum	240

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com