

DETAIL & SUBMITTAL SHEET

- Heavy-duty steel construction
- Flow-coated, baked-on factory prime finish
- Corrosion-resistant zinc-plated, chromate-sealed hardware
- Torsion Cam Lift system provides easy, one-hand operation
- Slide bolt locking mechanism (optional keyed lock available)
- Flanged construction and J-channel header shed water and prevent binding due to ice and snow, permitting all season use
- Extensions are available to increase the door length for sizes **Classic Series Door only**
 - Classic Series: 6", 12", 18" and 24" lengths
 - Two or more extensions can be mounted back to back for longer extensions.




✓	Model	Inside Width (W1)	*Outside Width (W2)	**Length (L) min-max
	SLW3641	36"-41"	45 1/4"	65 1/4"-67 3/4"
	SLW4651	46"-51"	55 1/4"	65 1/4"-67 3/4"
	SLW4751	47"-51"	55 1/4"	74 1/2"-77"
	SLW5055	50"-55"	59 1/4"	67 3/4"-70 1/4"
	SLW5459	54"-59"	63 1/4"	74 1/2"-77"
	6" Ext.	-	-	-
	12" Ext.	-	-	-
	18" Ext.	-	-	-
	24" Ext.	-	-	-
	Ultra Door Lock	-	-	-

*The frame of the door must overlap the foundation sidewalls by at least 2" on each side.

**The SLW door length is adjustable for installation flexibility.

Record your foundation dimensions here

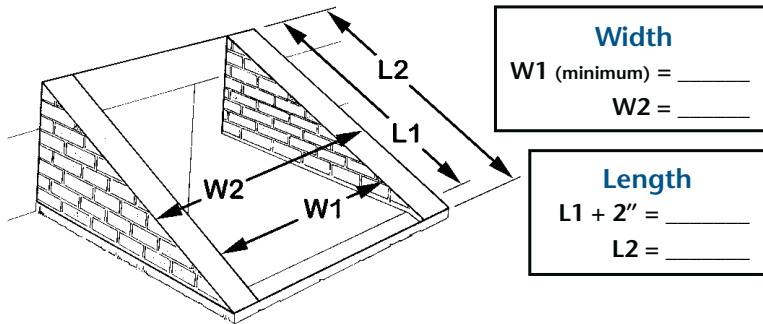

Classic Series Sloped Wall Doors

1. Discard your old door and measure the dimensions of the areaway foundation as shown.
2. Measure dimension W1, the inside width, and W2, the outside width of the foundation sloped sidewalls. Walls may not be uniformly spaced, so check at several points for the narrowest dimension.
3. Measure dimension L1, the inside length, and L2, the outside length of the areaway foundation. Record your dimensions and make the calculation shown.
4. Select the widest and longest SLW Door from the table to the right that will fit between the foundation sidewalls. Frame length should be between L1 + 2" and L2. Frame length can be extended with optional extension panels.

by Bilco

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com