


DETAIL & SUBMITTAL SHEET



FRONT ELEVATION

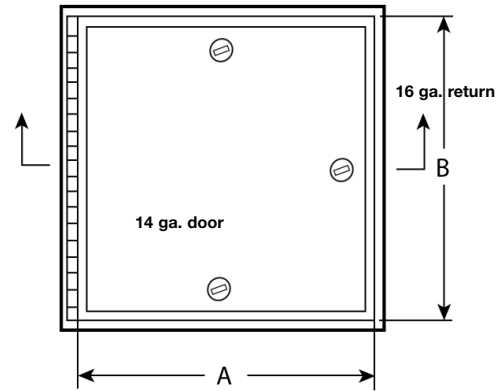

SPECIFICATIONS:

Door: 14. ga. steel. Door is recessed to accommodate up to 1" thick acoustical tile

Frame: 16 ga. steel

Hinge: Continuous piano hinge opens 180°


Latches: Flush, stainless steel cam latch

Finish: White baked enamel coat

Options:

- Key operated medium barrel cylinder lock
- Gasketing on all 4 sides*
- Special sizes available

SECTION DETAIL

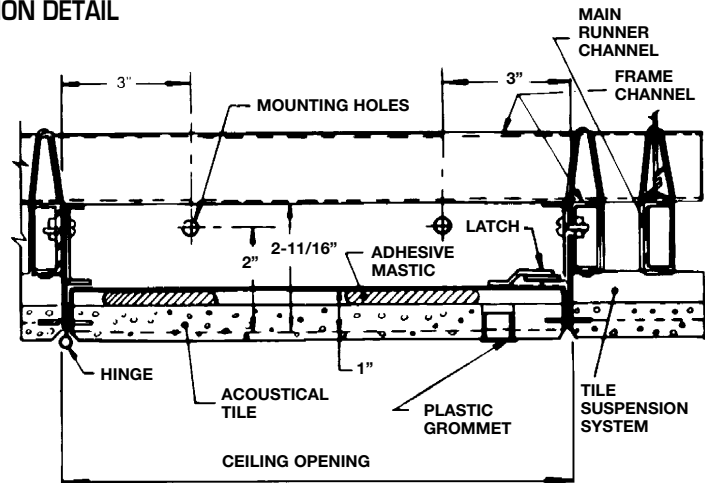

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	AT 600	12 x 12	12 1/4 x 12 1/4	1	8
	AT 600	18 x 18	18 1/4 x 18 1/4	3	15
	AT 600	24 x 24	24 1/4 x 24 1/4	3	28

A precision door that provides a virtually concealed installation, keeping acoustical surfaces intact while contributing to sound control and better appearance.

* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com