


DETAIL & SUBMITTAL SHEET



FRONT ELEVATION

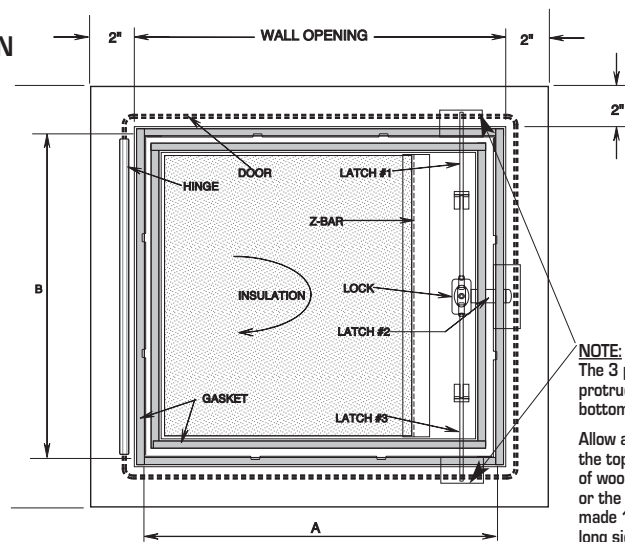

NOTE:
The 3 prong handle protrudes at top and bottom of door.
Allow a 1-1/2" cut out on the top and bottom edge of wood or steel frame or the wall opening can be made 1/4" larger on the long side, (B).
The 12 x 12, 14 x 14 and 16 x 16 have a single point catch.

SPECIFICATIONS:

Door: 16 ga. steel. Trim 1 1/2" wide

Frame: 16 ga. steel, 2 3/8" depth

Gasketing: Open celled microcellular polyurethane on inside of door and closed cell neoprene sponge SC42 W/PSA stripping gasketing on the back of the door

Insulation: Double layer of 1" GreenGuard® Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2, FM approved*

Hinges: Continuous piano hinge. Allows opening to 180°.

Latches: Chrome plated "T" type handle with pivot rod 3 point catch. WB 151 key code cylinder lock. The 12 x 12, 14 x 14 and 16 x 16 have a single point catch. **Opens from the outside only.**


Finish: Zinc dipped baked grey enamel

Application: For exterior purposes, weather resistive

OPTIONS:

Special sizes available

SECTION DETAIL

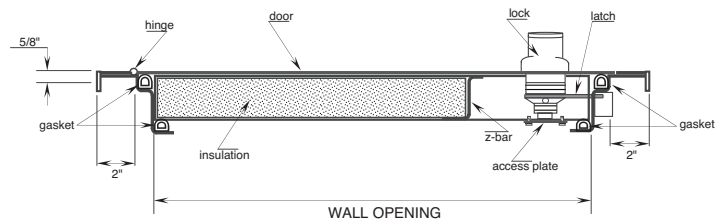

The one of a kind exterior access door is zinc dipped, insulated and includes two types of gasketing. Weather resistive open celled microcellular polyurethane gasketing and closed cell neoprene sponge SC42 W/PSA stripping gasketing on inside for outdoor applications [certain saltwater areas might not be compatible].

✓	Item No.	Door Size W x H	Wall Opening *	Ship Wt. Lbs.
	EXT 1300	12 x 12	12 1/4 x 12 1/4	27
	EXT 1300	14 x 14	14 1/4 x 14 1/4	32
	EXT 1300	16 x 16	16 1/4 x 16 1/4	36
	EXT 1300	18 x 18	18 1/4 x 18 1/4	41
	EXT 1300	22 x 30	22 1/4 x 30 1/4	45
	EXT 1300	22 x 36	22 1/4 x 36 1/4	50
	EXT 1300	24 x 24	24 1/4 x 24 1/4	55
	EXT 1300	24 x 36	24 1/4 x 36 1/4	67
	EXT 1300	30 x 30	30 1/4 x 30 1/4	75
	EXT 1300	30 x 36	30 1/4 x 36 1/4	79
	EXT 1300	36 x 36	36 1/4 x 36 1/4	90

* For wall opening sizes see elevation drawing above.

* **GreenGuard®** Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2. R means resistance to heat flow. The higher the R-Value the greater the insulating power and energy saving capability. Compliance: BOCA 90-78, SBCCI 2228A, ICBO 4280, CA BHF TB 1334, MN Dept. of Energy Chapter 7640, CCMC 12722-L, Und. Lab. Inc.® See Classification Certificate A183. FM Approved.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com