


DETAIL & SUBMITTAL SHEET

WALLS & CEILINGS



FRONT ELEVATION

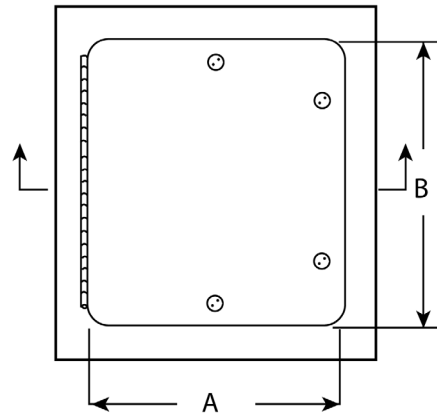

SPECIFICATIONS:

- Door: 12 ga. steel.
- Frame: 16 ga. steel.
- Hinge: Semi-concealed piano hinge. Allows opening to 180°.
- Anchors: Heavy steel, welded to frame.
- Lock: Counter sunk tamperproof screws
- Finish: Grey baked enamel coat

OPTIONS:


Finishes:

- Stainless Steel Type 304 No. 4 Satin Finish Brushed
- Stainless Steel Type 316 No. 4 Satin Finish Brushed

Options:

- Best lock available
- Weather resistive neoprene gasketing all 4 sides*
- Special sizes available

SECTION DETAIL

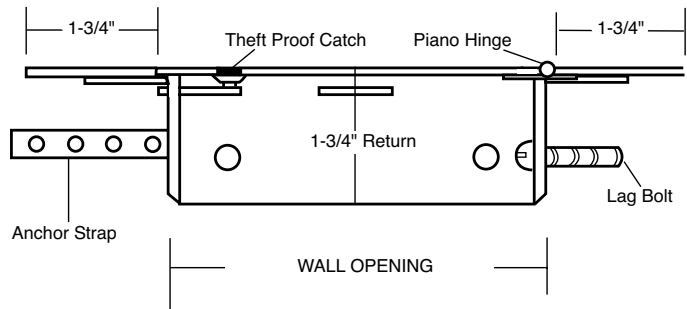

✓	Item No.	Door Size W x H	Wall Opening	Tamper Proof Screws	Ship Wt. Lbs.
	MD SEC 1000	12 x 12	12 1/4 x 12 1/4	3	22
	MD SEC 1000	16 x 16	16 1/4 x 16 1/4	3	31
	MD SEC 1000	18 x 18	18 1/4 x 18 1/4	3	36
	MD SEC 1000	24 x 24	24 1/4 x 24 1/4	4	52
	MD SEC 1000	24 x 36	24 1/4 x 36 1/4	4	73
	MD SEC 1000	36 x 36	36 1/4 x 36 1/4	5	103

A special snake eye screwdriver is required to open this door



This door assures medium security whenever it is necessary under institutional conditions. Most detention buildings and mental care facilities require access to vital services in or behind walls, shafts and stairwells.

* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com