


**SUBMITTAL SHEET**



Masonry anchor straps standard on all fire-rated doors



**FRONT ELEVATION**

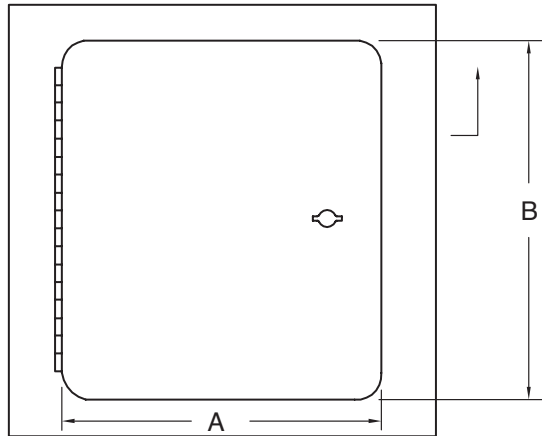

**SECTION DETAIL**

**SPECIFICATIONS:**

Door: 14 ga. steel.

Trim: 16 ga. steel

Finish: Primed grey baked enamel


Latches: Self-latching direct action latch accepts both key and knurled knob

Hinge: Continuous piano hinge. Allows opening to 180°.

Rating: No temperature rise

**OPTIONS (at additional cost)**

- Mortise Best Lock and locks by others
- Hot Smoke Seal\* gasket all 4 sides
- Special sizes available
- \_\_\_\_\_

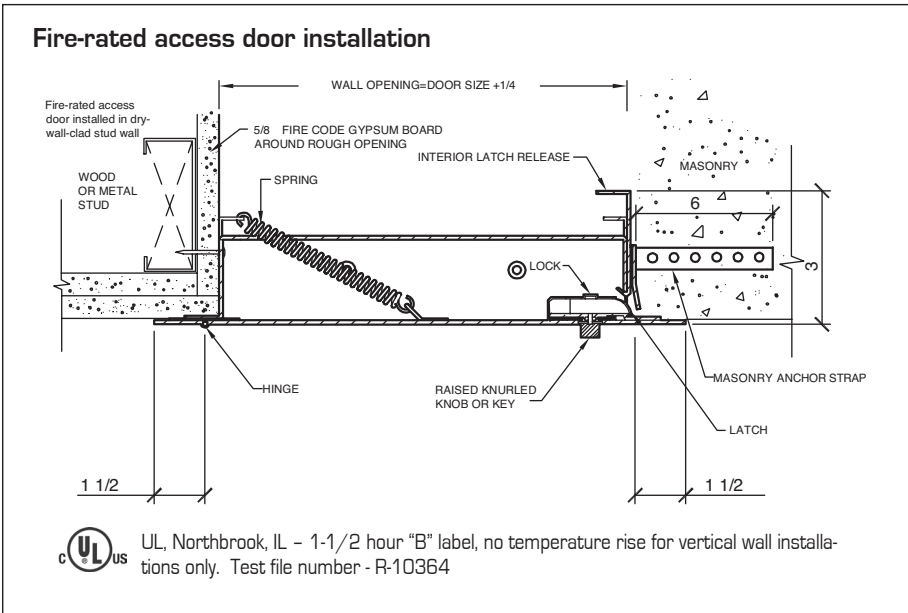

UL, Northbrook, IL - 1-1/2 hour "B" label, no temperature rise for vertical wall installations only. Test file number - R-10364

Item No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
FRB 900	8 x 8	8 1/4 x 8 1/4	1	8
FRB 900	10 x 10	10 1/4 x 10 1/4	1	10
FRB 900	12 x 12	12 1/4 x 12 1/4	1	12
FRB 900	14 x 14	14 1/4 x 14 1/4	1	14
FRB 900	16 x 16	16 1/4 x 16 1/4	1	17
FRB 900	18 x 18	18 1/4 x 18 1/4	1	21
FRB 900	20 x 20	20 1/4 x 20 1/4	1	24
FRB 900	22 x 22	22 1/4 x 22 1/4	1	28
FRB 900	22 x 30	22 1/4 x 30 1/4	1	29
FRB 900	22 x 36	22 1/4 x 36 1/4	1	30
FRB 900	24 x 24	24 1/4 x 24 1/4	1	32
FRB 900	24 x 30	24 1/4 x 30 1/4	2	43
FRB 900	24 x 36	24 1/4 x 36 1/4	2	50
FRB 900	30 x 30	30 1/4 x 30 1/4	2	50
FRB 900	36 x 36	22 1/4 x 22 1/4	2	60

\* Hot Smoke Seal™ fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies.

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ App Initials: \_\_\_\_\_

Corp Off: 1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • Fax: 1-800-822-5001 [www.wbdoors.com](http://www.wbdoors.com)

