


**SUBMITTAL SHEET**

**WALLS & CEILINGS**

**FRONT ELEVATION**

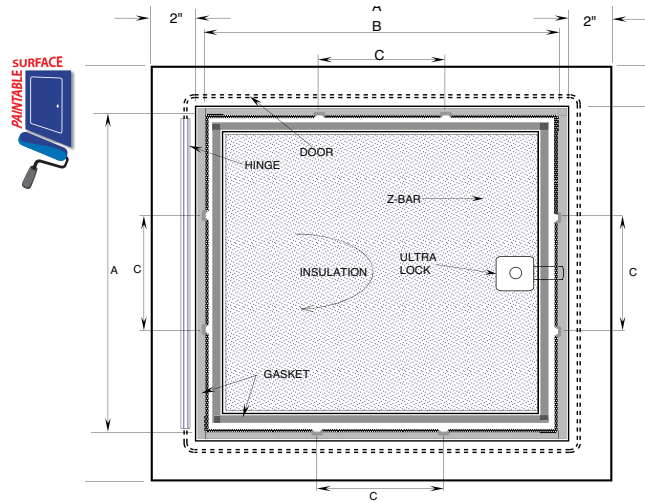


**SPECIFICATIONS:**

- Door:** 16 ga. steel\*\*
- Trim:** 16 ga. steel\*\*
- Finish:** Primed white baked grey enamel, paintable surface
- Latches:** Paddle latch lock and slam catch and interior latch release
- Hinges:** Continuous piano hinge
- Insulation:** Double layer of 1" GreenGuard® Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2, FM approved\*
- Gasket:** Open celled microcellular polyurethane on inside of door and closed cell neoprene sponge SC42 W/PSA stripping gasket on the back of the door
- Application:** For exterior purposes, weather resistive


**OPTIONS (at additional cost)**

- Special sizes available
- 




Microcellular polyurethane gasket

Neoprene sponge SC42 W/PSA stripping gasket applied on back inside edge



Ultra Paddle Latch Lock w/ 151 key

**SECTION DETAIL**

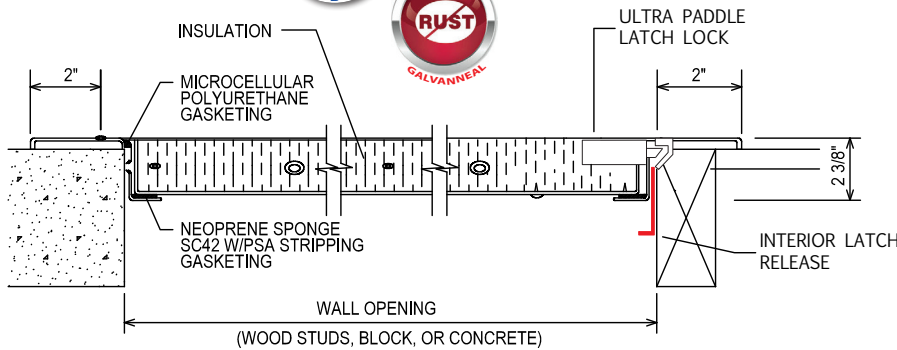

The one of a kind exterior access door is galvanized\*\* steel, insulated with 1" GreenGuard and includes two types of gasket. Weather resistive open celled microcellular polyurethane gasket and closed cell neoprene sponge SC42 W/PSA stripping gasket on inside for outdoor applications [certain saltwater areas might not be compatible].

\* GreenGuard® Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2. R means resistance to heat flow. The higher the R-Value the greater the insulating power and energy saving capability. Compliance: BOCA 90-78, SBCCI 2228A, ICBO 4280, CA BHF TB 1334, MN Dept. of Energy Chapter 7640, CCMC 12722-L, Und. Lab. Inc.® See Classification Certificate A183. FM Approved.

- \*\* Galvanized steel: The preferred coated steel for use in architectural applications.
- Coated in zinc, heated to over 1000° F so iron is pulled from steel.
  - Iron mixes with zinc coating, making it harder, more scratch-resistant, uniform in appearance.
  - Galvanized steel bonds better with paint, and better for welding.

✓	Model No.	Door Size W x H	Wall Opening *	Ship Wt. Lbs.
	EXT 1350	8 x 8	8 1/4 x 8 1/4	25
	EXT 1350	12 x 12	12 1/4 x 12 1/4	27
	EXT 1350	14 x 14	14 1/4 x 14 1/4	30
	EXT 1350	16 x 16	16 1/4 x 16 1/4	35
	EXT 1350	18 x 18	18 1/4 x 18 1/4	40
	EXT 1350	20 x 20	20 1/4 x 20 1/4	42
	EXT 1350	20 x 30	20 1/4 x 30 1/4	44
	EXT 1350	22 x 22	22 1/4 x 22 1/4	44
	EXT 1350	22 x 30	22 1/4 x 30 1/4	45
	EXT 1350	22 x 36	22 1/4 x 36 1/4	50
	EXT 1350	24 x 24	24 1/4 x 24 1/4	55
	EXT 1350	24 x 30	24 1/4 x 30 1/4	60
	EXT 1350	24 x 36	24 1/4 x 36 1/4	67
	EXT 1350	24 x 48	24 1/4 x 48 1/4	100
	EXT 1350	30 x 30	30 1/4 x 30 1/4	65
	EXT 1350	32 x 32	32 1/4 x 32 1/4	77
	EXT 1350	30 x 36	30 1/4 x 36 1/4	79
	EXT 1350	30 x 48	30 1/4 x 48 1/4	85
	EXT 1350	36 x 36	36 1/4 x 36 1/4	90
	EXT 1350	36 x 48	36 1/4 x 48 1/4	165

**RELATED PRODUCTS**

**WB Exterior 1300 T-Handle Series Access Door**



Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_  
 Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ App Initials: \_\_\_\_\_

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • [www.wbdoors.com](http://www.wbdoors.com)

