



SUBMITTAL SHEET

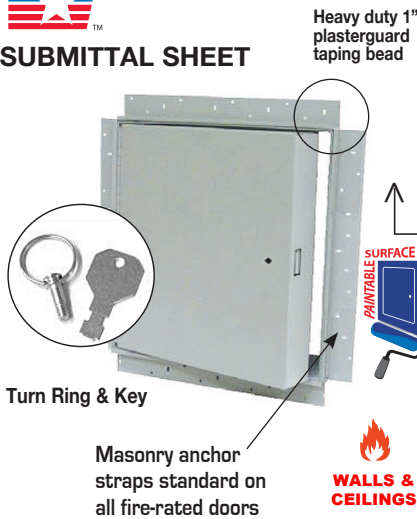

FRONT ELEVATION

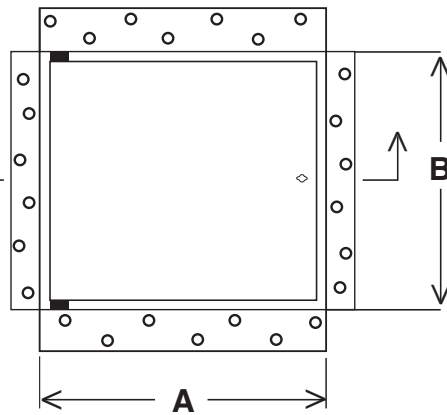

SECTION DETAIL


SPECIFICATIONS:

- Door:** 2" thick insulated 20 ga. steel
- Trim:** 1 3/8" wide plasterguard, with flange recessed 3/4"
- Finish:** Primed white coated enamel, paintable surface
- Latches:** Universal turn ring and key lock
- Hinge:** Fully concealed, pivot rod type hinge. Allows opening to 140°
- Insulation:** 2" thick, ThermaFiber® Industrial Felt
- Ceiling Installation:** Largest size acceptable is up to and including 24" x 36"

OPTIONS (at additional cost)

- Finishes:**
- Stainless Steel Type 304 No. 4 Satin Finish Brushed
 - Stainless Steel Type 316 No. 4 Satin Finish Brushed
- Options: (additional cost)**
- Mortise Best Lock and locks by others
 - Hot Smoke Seal* gasket all 4 sides
 - Special sizes available

Fire-rated access door for ceiling and wall installation

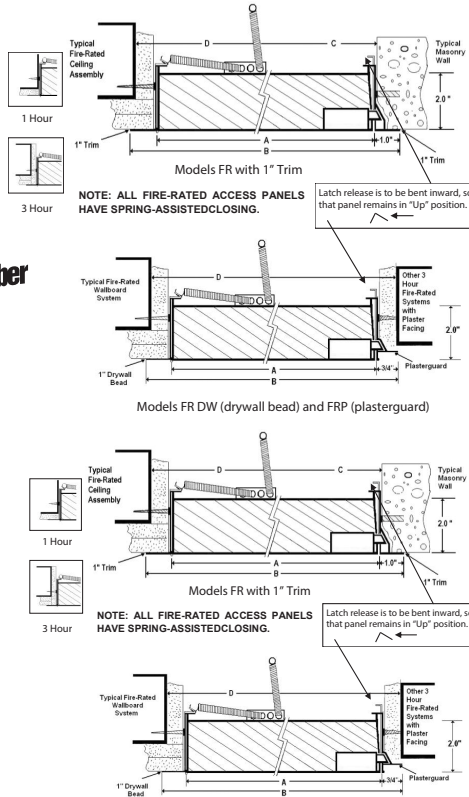

UL LISTED
 Wall Installation: 1-1/2 hour UL "B" label in a 2 hour fire barrier. File # R13067-1. Maximum size 48" x 48"

UL LISTED
 Ceiling Installation: Warnock Hersey listed for floor or ceiling installations with 3 hour non combustible rating or 1 hour combustible rating. File # WHI-495-PSH-0163. Maximum size 24" x 36"

CSFM: This product has been approved by the California State Fire Marshall (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing No 3330-1223:101 for allowable values and/or conditions for use concerning material presented in this document. It is subject reexamination, revision and possible cancellation.

Item No.	Door Size W x H	Wall Opening	Ultra Lock	Ship Wt. Lbs.
FR PL 845	8 x 8	8 1/4 x 8 1/4	1	8
FR PL 845	10 x 10	10 1/4 x 10 1/4	1	10
FR PL 845	12 x 12	12 1/4 x 12 1/4	1	12
FR PL 845	12 x 18	12 1/4 x 18 1/4	1	12
FR PL 845	12 x 24	12 1/4 x 24 1/4	1	19
FR PL 845	14 x 14	14 1/4 x 14 1/4	1	14
FR PL 845	16 x 16	16 1/4 x 16 1/4	1	17
FR PL 845	18 x 18	18 1/4 x 18 1/4	1	21
FR PL 845	18 x 24	18 1/4 x 24 1/4	1	26
FR PL 845	20 x 20	20 1/4 x 20 1/4	1	24
FR PL 845	20 x 24	20 1/4 x 24 1/4	1	26
FR PL 845	20 x 30	20 1/4 x 30 1/4	2	32
FR PL 845	21 x 36	21 1/4 x 36 1/4	2	37
FR PL 845	22 x 22	22 1/4 x 22 1/4	1	28
FR PL 845	22 x 24	22 1/4 x 24 1/4	1	29
FR PL 845	22 x 30	22 1/4 x 30 1/4	2	39
FR PL 845	22 x 36	22 1/4 x 36 1/4	2	47
FR PL 845	24 x 24	24 1/4 x 24 1/4	1	32
FR PL 845	24 x 30	24 1/4 x 30 1/4	2	43
FR PL 845	24 x 36	24 1/4 x 36 1/4	2	48
FR PL 845	24 x 48*	24 1/4 x 48 1/4	2	62
FR PL 845	30 x 30*	30 1/4 x 30 1/4	2	50
FR PL 845	32 x 32*	32 1/4 x 32 1/4	2	60
FR PL 845	36 x 36*	36 1/4 x 36 1/4	2	67
FR PL 845	36 x 48*	36 1/4 x 48 1/4	2	88
FR PL 845	48 x 48*	48 1/4 x 48 1/4	2	104

* Maximum ceilings size is 24"x36"

* Hot Smoke Seal™ fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 105, UBC 7-2, Part 2, and BS476:Part 31, Section 31.1:1983.

ThermaFiber THERMAFIBER® Industrial Felt insulation for optimal fire protection (rated noncombustible by NFPA Standard 220 when tested in accordance with ASTM E136 and withstands ASTM E119) and superior sound control USG tested per ASTM C165: 8 pcf STC 15-2" thickness

Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

Corp Off:1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • Fax: 1-800-822-5001 www.wbdoors.com

RELATED PRODUCTS

WB FR DW 825 Series for Drywall Fire-Rated

WB PL 500 Series for Plaster



American Made
Family Owned & Operated
 Since 1990
 Selling only through distribution



facebook.com/wbdoors