

## **SUBMITTAL SHEET**




WALLS & CEILINGS



## **BACK ELEVATION**

SECTION DETAIL

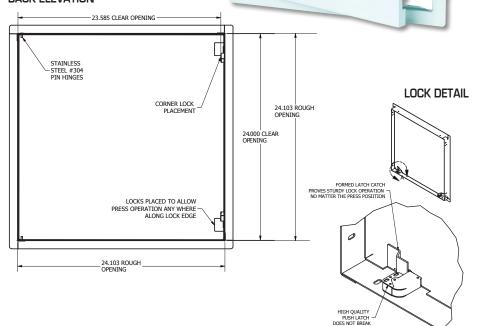

## PROVIDES A RIGID BUILD OBLONG INSTALLATION HOLE PROVIDES A RIGID BUILD OBLONG INSTALLATION HOLE ALLOWS FOR EASY INSTALLATION TOUCH LATCHES PLACED AT EDGES INTO ROUGH OPENING ROUGHLY AT CORNERS SCREWS WILL PROTRUDE INTO ROUGH OPENING ROUGHLY 1.25 INCHES, SMALLEST IN THE INDUSTRY

18 GA COLD

Project:		Date:
Contractor:	Architect:	
Sizes:	_Quantity:	_App Initials:

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • **WWW.whdoors.com** 

## SPECIFICATIONS:

The **WB B2 Series** is a universal, non-rated access door. 18 ga. steel, formed door provides strength and rigidness, and comes with two concealed touch latch. The door is suitable for left- or right-hand operation. The steel frame with a rounded profile flange provides a smooth transition to almost any installation surface. Four riveted wall anchors ensure a quick and safe installation for any non-rated wall or ceiling application.

Door: 18 ga. steel Trim: 18 ga. steel

Finish: Primed white baked enamel, paintable surface Latches: Heavy Duty Concealed Touch Latches

Hinges: Concealed Hinge

- Fast delivery
- Economical solution
- Quick and easy installation
- Superior engineering and innovative design

/	Model No.	Door Opening	Rough Opening	Ship Wt. Lbs.
	WB B2	6 x 6	6 3/8 x 6 3/8	4
	WB B2	8 x 8	8 3/8 x 8 3/8	5
	WB B2	10 x 10	10 3/8 x 10 3/8	6.5
	WB B2	12 x 12	12 3/8 x 12 3/8	8
	WB B2	12 x 24	12 3/8 x 24 3/8	15
	WB B2	14 x 14	14 3/8 x 14 3/8	10
	WB B2	14 x 24	14 3/8 x 24 3/8	16
	WB B2	16 x 16	16 3/8 x 16 3/8	13
	WB B2	18 x 18	18 3/8 x 18 3/8	17
	WB B2	18 x 24	18 3/8 x 24 3/8	20
	WB B2	20 x 20	20 3/8 x 20 3/8	17
	WB B2	22 x 22	22 3/8 x 22 3/8	20
	WB B2	24 x 24	24 3/8 x 24 3/8	24
	WB B2	24 x 30	24 3/8 x 30 3/8	26
	WB B2	24 x 36	24 3/8 x 36 3/8	28
	WB B2	30 x 30	30 3/8 x 30 3/8	28



