


SUBMITTAL SHEET



FRONT ELEVATION

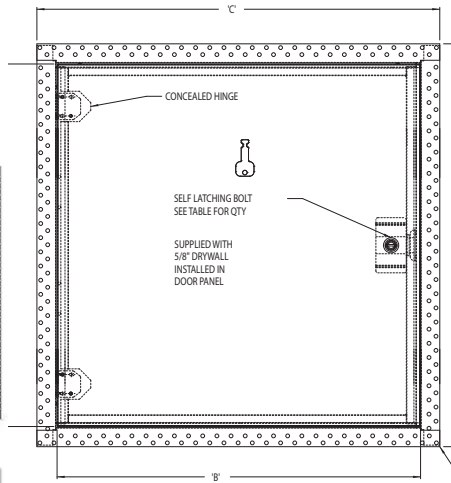

SPECIFICATIONS:

Door: 22 ga. steel. Recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

Trim: 22 ga. steel, press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

Finish: Satin coat steel

Latches: Self-latching bolt, operated by flush key

Hinge: Concealed.

Rating: (Walls): Meets 1½ hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104-10 for max size upto 24" x 36"

OPTIONS (at additional cost)


☐ Special sizes available



✓	Model No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
	FR-RDW 860	12 x 12	12 3/8 x 12 3/8	1	10
	FR-RDW 860	16 x 16	16 3/8 x 16 3/8	1	14
	FR-RDW 860	18 x 18	18 3/8 x 18 3/8	1	18
	FR-RDW 860	24 x 24	24 3/8 x 24 3/8	1	29
	FR-RDW 860	24 x 36	24 3/8 x 36 3/8	2	42

SECTION DETAIL

Fire-rated access door installation

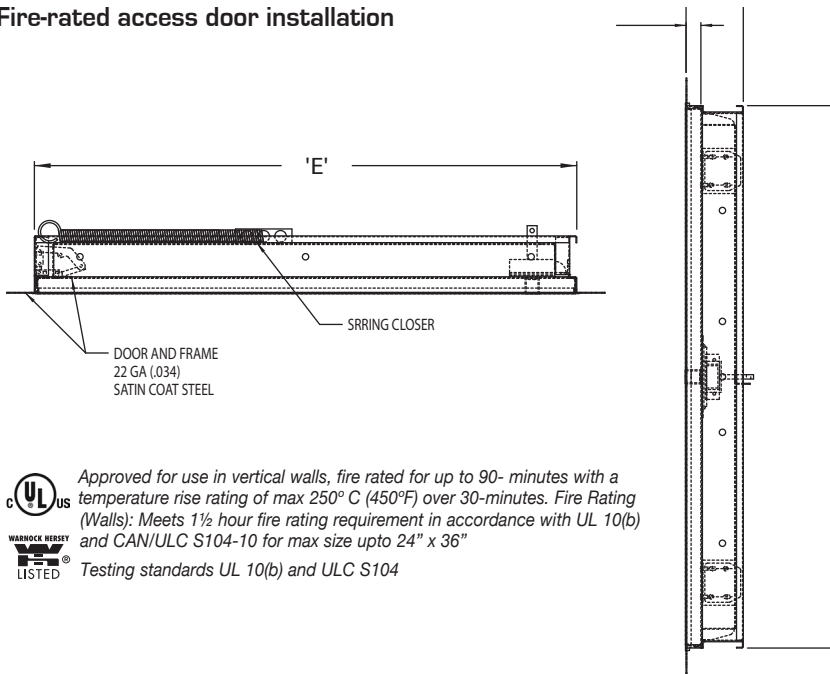

FIRE RATED Recessed for drywall walls For installation in drywall walls requiring concealing of the door panel consistent to surroundings.

*This product is the proprietary property of Acudor Products. It is sold and distributed by The Williams Brothers Corporation of America with proper authorization.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



AWCI ASSOCIATION OF THE WALL AND CEILING INDUSTRY

The World's Largest Access Door Store.™



WBdoors.com

BuyOnline

WBCA 2024

