
SECTION DETAIL





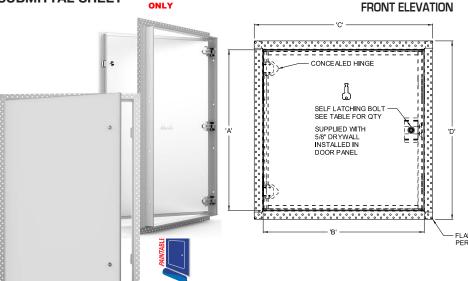

Fire-rated access door ceiling installation 2.563 5/8" RECESS DOOR CLOSING SPRING BRACKETS ARE SUPPLIED ON DOORS LARGER THAN 16" X 16" FOR CEILING INSTALLATION Ø 1/4" TYP. MOUNTING **HOLES** 1-1/2" FIRE RATED INSULATION DOOR AND FRAME 22 GA (.034) SPRING CLOSER SATIN COAT STEEL Meets 90 minutes Fire Resistance Rating in accordance with CAN ULC S101-14. ASTM E119-16 and NFPA 251Testing standards UL 10(b) and ULC S104 Testing Standards - CAN ULC S101-14, ASTM E119-16 and NFPA 251

FIRE RATED Recessed for drywall ceilings for installation in drywall ceilings requiring concealing of the door panel consistent to surroundings.

The WB RDW meets 3 hour fire rating requirement. For installation in drywall ceilings requiring concealing of the door panel consistent to surroundings. For use in Fire Rated Ceilings that needs tested and certified doors having Fire Resistance Rating of 90 minutes.

*This product is the proprietary property of Acudor Products. It is sold and distributed by The Williams Brothers Corporation of America with proper authorization.

Project:		Date:
Contractor:		
Sizes:	Quantity:	App Initials:
1330 Progress Drive	• Front Royal, VA 22630 • Phone: 1-800-255-5	515 • www.wbdoors.com

SPECIFICATIONS:

- Recessed reinforced insulated door fitted with 5/8" Firerated drywall.
- · Concealed hinge & self-centering device ensures seamless appearance in ceiling
- · Self-closing & self-latching door mechanism
- · Perforated Frame ensures trouble-free application of skim coat to edge of the door
- · Zinc coated steel provides superior corrosion resistance

Door: 22 ga. steel. Recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

Trim: 22 ga. steel. press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

Finish: Satin coat steel

Latches: Self-latching bolt, operated by flush key

Hinge: Concealed.

FLAI Rating: (Ceilings): Meets 90 minutes Fire Resistance Rating in accordance with CAN ULC S101-14, ASTM E119-16 and NFPA 251. Testing standards UL 10(b) and

OPTIONS (at additional cost)

- ☐ WB Cylander lock, 2 keys per door, keyed alike
- Special sizes available

~	Model No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
	FR-RDW 870	12 x 12	12 3/8 x 12 3/8	1	10
	FR-RDW 870	16 x 16	16 3/8 x 16 3/8	1	14
	FR-RDW 870	18 x 18	18 3/8 x 18 3/8	1	18
	FR-RDW 870	24 x 24	24 3/8 x 24 3/8	1	29
	FR-RDW 870	24 x 36	24 3/8 x 36 3/8	2	42

