


SUBMITTAL SHEET



FRONT ELEVATION

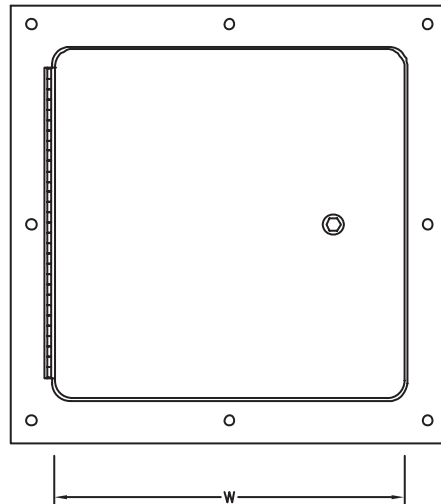

- Surface mount, 16mm [5/8"] deep door assembly.
- Ideal when objects (pipes etc.) interfere with the standard inner door frame.
- Quick installation, surface mounting holes
- Exterior appearance is compatible with the non-rated and fire-rated access Williams Brothers access door line, so uniformity of design is maintained when the doors are installed in the same building

SPECIFICATIONS:

Door: 16 ga. steel

Trim: 16 ga. steel

Finish: Electrostatically applied rust inhibitive prime coat [off-white]

Latches: The standard factory installed latch is a flush mount 1/4" allen key. All fire-rated locks are self-latching and include an interior latch release mechanism allowing the doors to be opened from the inside.

Hinges: Continuous piano hinge

Flange: 17/16" exterior flange, Frame Depth "D" = 5/8" [Overall Dimension = 13/16"]

Ordering: Please order by finished rough opening size. These doors are non-returnable.


Installation: The panel is surface mounted through all the holes on the outer flange. Review installation drawings before installing. The number of mounting holes will vary with the size of the door.

Fire-rated access door, wall only installation for 2 hr only.

This fire-rated door can be used wherever it is necessary to provide service access to shafts and any other location which must have a fire rating. Approved wall use.



SECTION DETAIL

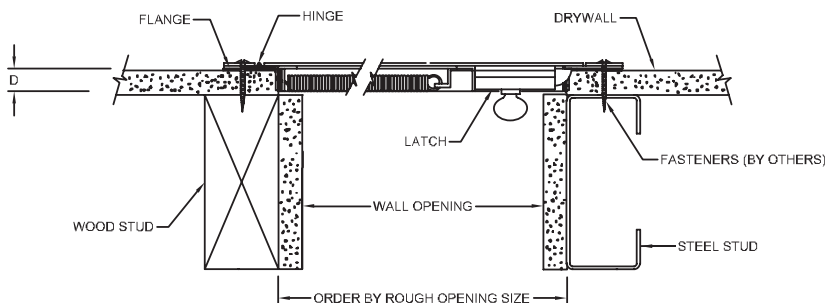

✓	Item No.	Door Size W x H	Wall Opening *	Ship Wt. Lbs.
	FR SMP 840	6 x 6	6 1/4 x 6 1/4	3
	FR SMP 840	8 x 8	8 1/4 x 8 1/4	5
	FR SMP 840	10 x 10	10 1/4 x 10 1/4	6
	FR SMP 840	12 x 12	12 1/4 x 12 1/4	7
	FR SMP 840	18 x 18	18 1/4 x 18 1/4	9
	FR SMP 840	24 x 24	24 1/4 x 24 1/4	12

The FR SMP 840 is designed to maintain the continuity of a fire barrier when installed in a vertical separation. The assembly is manufactured under the factory inspection service of Intertek (Warnock Hersey) and has a label reading: "Listed access frame and fire door assembly. 2 hour fire rating. Vertical installation only. No temperature rise rating"

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com

RELATED PRODUCTS

WB FRU 810 Ultra Series Fire-Rated



AWCI ASSOCIATION OF THE WALL AND CEILING INDUSTRY

The World's Largest Access Door Store.™

