


Continuous Piano Hinge W-0.33" W+3"



The WB ADWT is a flush access door that has been tested for air infiltration and water penetration. The Door and frame are fully welded and gasketed. This access door is ideal for use in laboratories, clean rooms, operating rooms, etc. where an airtight/watertight seal is required.

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • **WWW.Wbdoors.com**

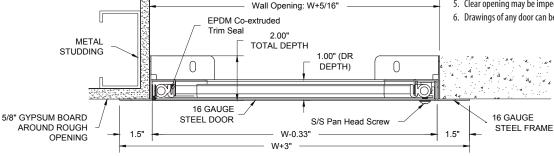

SECTION DETAIL

SPECIFICATIONS:

Door & Trim: 16 ga. steel, Trim 1 1/2" wide

Finish: 5 stage iron phosphate with prime coat of
white alkyd baking enamel, paintable surface

Latch: Stainless Steel phillips head screws standard

Hinge: Continuous stainless steel piano hinge

Air Infiltration: less than 0.01 cfm/sq foot-ASTM E 283

Water Penetration: No leakage at 15.05 psf-ASTM E

Gasket: Continuous bulb trim gasket

OPTIONS (at additional cost)

- ☐ Type 304 stainless steel with a #4 satin finish
- ☐ Stainless Steel allen head screws

•	Model No.	Door Size W x H	Wall Opening W x H	Ship Wt. Lbs.
	ADWT	8 x 8	8 5/16 x 8 5/16	10
	ADWT	12 x 12	12 5/16 x 12 5/16	12
	ADWT	14 x 14	14 5/16 x 14 5/16	13
	ADWT	16 x 16	16 5/16 x 16 5/16	14
	ADWT	18 x 18	18 5/16 x 18 5/16	15
	ADWT	24 x 24	24 5/16 x 24 5/16	21
	ADWT	24 x 36	24 5/16 x 36 5/16	30
	ADWT	30 x 30	30 5/16 x 30 5/16	30
	ADWT	30 x 48	30 5/16 x 48 5/16	31
	ADWT	36 x 48	36 5/16 x 48 5/16	49

- 1. When a door increases in size, more cams are added for security
- For requests on clear opening after door installed, please email <u>info@</u> wbdoors.com
- 3. All installation holes must be used for proper door functionality and security
- 4. For custom sizes, please reach out to info@wbdoors.com
- 5. Clear opening may be impeded by structural or functional parts on door
- 6. Drawings of any door can be requested through info@wbdoors.com

