

SUBMITTAL SHEET


WALLS & CEILINGS



Flush, stainless steel cam latch opens with screw-driver



FRONT ELEVATION

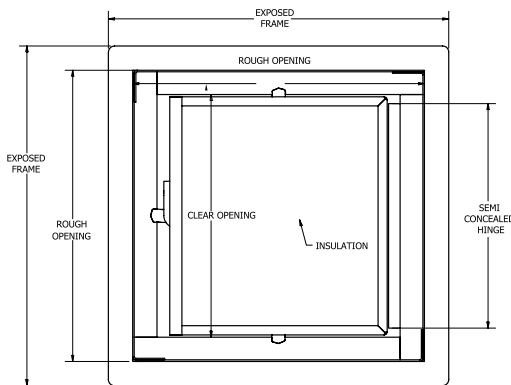

THE WILLIAMS BROTHERS ADVANTAGE


Durability: Taber Abrasion Tested - Withstood 4,550 cycles (ASTM D4060) with a wear index of 91.1 for a durable, long-lasting finish.

Corrosion Resistance: Salt Spray Tested - Withstood 48 hours of ASTM B117 exposure with only slight edge rusting, demonstrating excellent resistance to harsh environments.

UV Resistance: Tested to ASTM G155 & G154 standards - Withstood 48 hours of continuous UV exposure with negligible visual change, ensuring color stability and finish durability in sunlit environments.



SECTION DETAIL

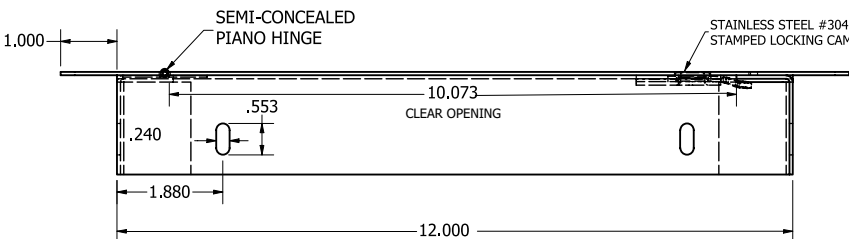

This lightweight, insulated, all aluminum access door is ideal for exterior applications, and also those specific interior applications where corrosion or moisture is a concern. Access to large openings in walls and ceilings is made easy. The non-extruded door frame has the same visual aesthetic design as the UAD Series door. Comes with gasket on 3 sides. The aluminum door panel is insulated with 1" KINGSPAN GreenGuard Insulation.

1. When a door increases in size, more cams are added for security in the ceiling or wall
2. For requests on clear opening after door installed, please email info@wbdoors.com
3. All installation holes must be used for proper door functionality and security
4. For custom sizes, please reach out to info@wbdoors.com
5. Clear opening may be impeded by structural or functional parts on door
6. Drawings of any door can be requested through info@wbdoors.com

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com

SPECIFICATIONS:

Door & Trim: Non-extruded 5052 .063 Aluminum

Finish: Primed white baked enamel, paintable surface

Latch: Flush SS 304 cam latch

Hinge: Semi-concealed piano hinge allows 165° opening

Insulation: KINGSPAN GreenGuard® Insulation, with an R-value of 5.0 per inch at a mean temperature of 75° F

Gasket: Weather resistant neoprene gasket on 3 sides

OPTIONS (at additional cost)

- WB Key Cylinder Locks - keyed alike 2 keys per door
- Special sizes available

Clear opening of door is 2" inches smaller than door size.

Model No.	Door Size W x H	Wall Opening	Door Size W x H	SS Cams	Ship Wt. Lbs.
AL 1500	6 x 6	6 1/4 x 6 1/4	4 x 4	1	4
AL 1500	8 x 8	8 1/4 x 8 1/4	6 x 6	1	5
AL 1500	8 x 12	8 1/4 x 12 1/4	6 x 10	1	6
AL 1500	8 x 16	8 1/4 x 16 1/4	6 x 8	1	8
AL 1500	10 x 10	10 1/4 x 10 1/4	8 x 8	3	6
AL 1500	12 x 12	12 1/4 x 12 1/4	10 x 10	3	8
AL 1500	12 x 16	12 1/4 x 16 1/4	10 x 14	3	10
AL 1500	12 x 18	12 1/4 x 18 1/4	10 x 16	3	11
AL 1500	12 x 24	12 1/4 x 24 1/4	10 x 22	4	15
AL 1500	14 x 14	14 1/4 x 14 1/4	12 x 12	3	10
AL 1500	14 x 24	14 1/4 x 24 1/4	12 x 22	3	14
AL 1500	16 x 16	16 1/4 x 16 1/4	14 x 14	3	13
AL 1500	16 x 20	16 1/4 x 20 1/4	14 x 18	3	16
AL 1500	16 x 24	16 1/4 x 24 1/4	14 x 22	4	17
AL 1500	18 x 18	18 1/4 x 18 1/4	16 x 16	3	14
AL 1500	18 x 24	18 1/4 x 24 1/4	16 x 22	4	18
AL 1500	18 x 36	18 1/4 x 36 1/4	16 x 34	5	29
AL 1500	20 x 20	20 1/4 x 20 1/4	18 x 18	3	17
AL 1500	20 x 24	20 1/4 x 24 1/4	18 x 22	4	21
AL 1500	20 x 30	20 1/4 x 30 1/4	18 x 28	4	23
AL 1500	22 x 22	22 1/4 x 22 1/4	20 x 20	4	22
AL 1500	22 x 24	22 1/4 x 24 1/4	20 x 22	4	23
AL 1500	22 x 30	22 1/4 x 30 1/4	20 x 28	4	25
AL 1500	22 x 36	22 1/4 x 36 1/4	20 x 34	5	32
AL 1500	24 x 24	24 1/4 x 24 1/4	22 x 22	4	24
AL 1500	24 x 30	24 1/4 x 30 1/4	22 x 28	4	27
AL 1500	24 x 36	24 1/4 x 36 1/4	22 x 34	5	35
AL 1500	24 x 48	24 1/4 x 48 1/4	22 x 46	6	43
AL 1500	30 x 30	30 1/4 x 30 1/4	28 x 28	6	32
AL 1500	30 x 36	30 1/4 x 36 1/4	28 x 34	6	39
AL 1500	32 x 32	32 1/4 x 32 1/4	30 x 30	6	35
AL 1500	36 x 36	36 1/4 x 36 1/4	34 x 34	7	44
AL 1500	36 x 48	36 1/4 x 48 1/4	34 x 46	8	57
AL 1500	48 x 48	48 1/4 x 48 1/4	46 x 46	9	70

For clear opening please request at info@wbdoors.com



The World's Largest Access Door Store.™

