

**SUBMITTAL SHEET**

**WALLS & CEILINGS**



**SPECIFICATIONS:**

**Door:** 16 ga. steel. Door is recessed to meet sound barriers

**Trim:** 16 ga. steel

**Finish:** White baked enamel, **paintable surface**

**Latches:** Flush, stainless steel cam latch


**Hinge:** Continuous piano hinge opens 180°

**OPTIONS (at additional cost)**


- ☐ Key operated medium barrel cylinder lock
- ☐ Gasket on all 4 sides [Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized]
- ☐ Special sizes available
- ☐ \_\_\_\_\_

✓	Model No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	AT 600	12 x 12	12 1/4 x 12 1/4	1	8
	AT 600	18 x 18	18 1/4 x 18 1/4	3	15
	AT 600	24 x 24	24 1/4 x 24 1/4	3	28
	AT 600	24 x 36	24 1/4 x 24 1/4	3	32

**FRONT ELEVATION**

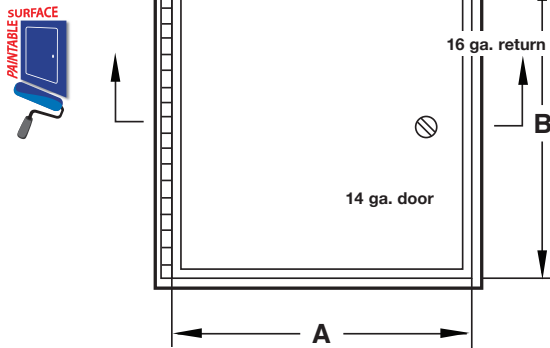

**SECTION DETAIL**

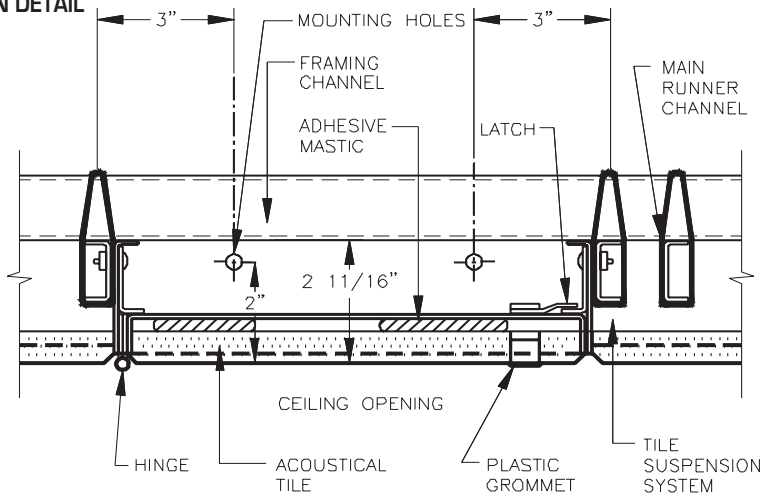

A precision door that provides a virtually concealed installation, 5/8" gypsum board, keeping acoustical surfaces intact while contributing to sound control with STC rating and better appearance.

1. When a door increases in size, more cams are added for security in the ceiling or wall
2. For requests on clear opening after door installed, please email [info@wbdoors.com](mailto:info@wbdoors.com)
3. All installation holes must be used for proper door functionality and security
4. For custom sizes, please reach out to [info@wbdoors.com](mailto:info@wbdoors.com)
5. Clear opening may be impeded by structural or functional parts on door
6. Drawings of any door can be requested through [info@wbdoors.com](mailto:info@wbdoors.com)

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ App Initials: \_\_\_\_\_

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • [www.wbdoors.com](http://www.wbdoors.com)

**RELATED PRODUCTS**

**WB DWAL 411 Aluminum Panel with Fixed Hinges**



*The World's Largest Access Door Store.™*

