


SUBMITTAL SHEET

WALLS OR CEILINGS

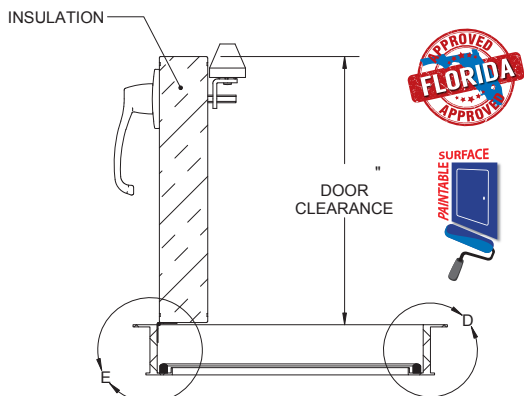



SPECIFICATIONS:

Door: Galvanealed 24 ga. steel
Trim: .080 inch 6063-T5 Extruded Aluminum
Finish: Primed grey baked enamel, **paintable surface**
Latches: Non-locking handle w/ optional interior handle, locking handle w/ optional interior handle
Hinges: Continuous stainless steel piano hinge
Insulation: 2" polyurethane insulation, 2 1/4 lb. density, 12 R-Value
Gasket: EPDM Self-Adhesive, Continuous 4 sides
Application/Approval: For exterior purposes, weather resistant. Florida Approval #FL22309

OPTIONS (at additional cost)


- ☐ Locking handle
- ☐ Interior handle
- ☐ Drip cap
- ☐ Special sizes available
- ☐ _____

FRONT ELEVATION

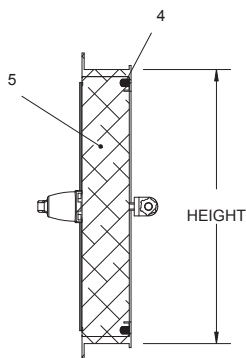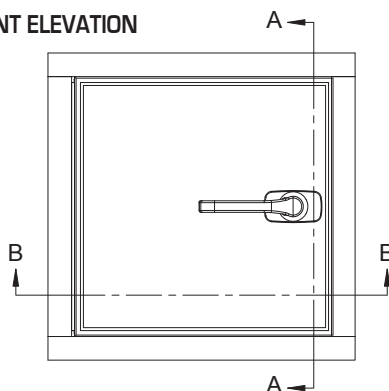


SECTION A-A

SECTION DETAIL

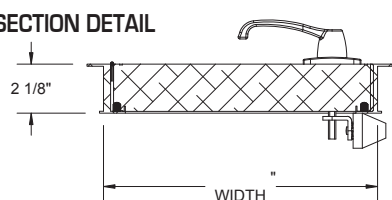

SECTION B-B

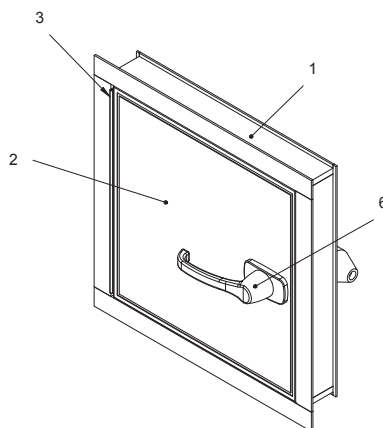

✓	Model No.	Door Diameter	Rough Opening	Ship Wt. Lbs.
	EXT 1475	18 x 18	18 x 18	5
	EXT 1475	20 x 30	20 x 30	8.5
	EXT 1475	24 x 24	24 x 24	10
	EXT 1475	24 x 30	24 x 30	15
	EXT 1475	24 x 36	24 x 36	15
	EXT 1475	36 x 36	36 x 36	15

Custom sizes available upon request.

RELATED PRODUCTS

WB EXT 1350 Ultra Series
Exterior Access Door

WB AL 1500 Series
Aluminum Access Door



Exterior Access Door is the industry's only high velocity and impact tested door. With a design pressure of +/- 80psf, this door is sure to withstand mother nature's toughest storms.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



The World's Largest Access Door Store.™

