



SUBMITTAL SHEET

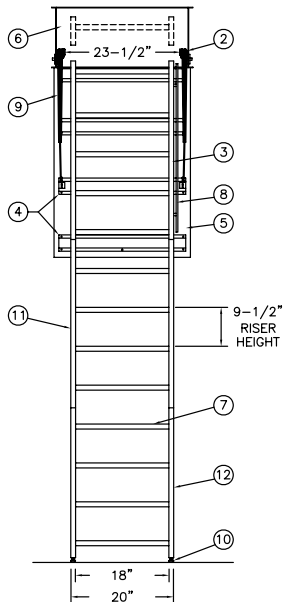

OPTIONS

- ☐ 2 HOUR FIRE RATED ASSEMBLY
☐ LOCK ON DOOR PANEL


ONE INCH FLANGE ALL AROUND TOP & BOTTOM

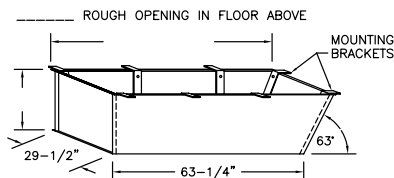

30" x 64" REQUIRED ROUGH OPENING IN CEILING

SPECIAL DEEP FRAME

1/8" STEEL, 63 DEGREE ANGLE ONE END, 90 DEGREE OTHER END, TO CONTAIN SUPER SIMPLEX FOLDING STAIRWAY CUT FOR EXACT FINISHED CEILING HEIGHT. THIS FRAME, WITH FACTORY INSTALLED BUILT-IN TREADS, PROVIDES STEPS FROM THE DROPPED-CEILING LINE TO THE UPPER FLOOR.




NOTES

DIMENSIONS ON THIS DRAWING PERTAIN ONLY TO CEILING HEIGHTS OVER 9'-9".

MANUFACTURER RECOMMENDS THAT 2 PEOPLE OPEN/CLOSE UNITS INSTALLED IN CEILINGS 11' & OVER.

SHIPS COMPLETELY ASSEMBLED AS ONE UNIT

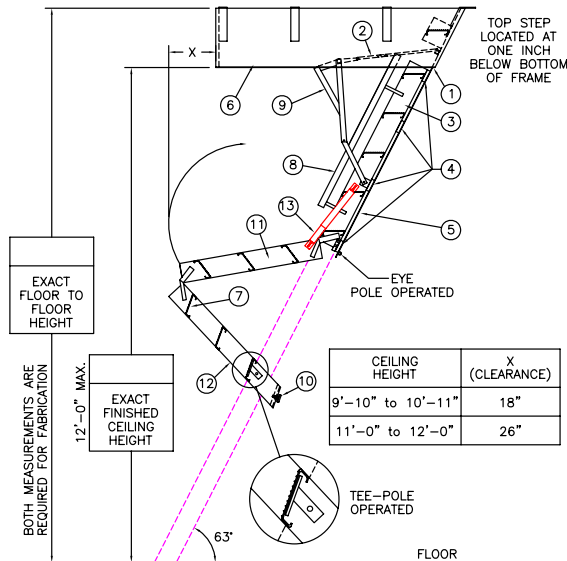

LADDER LEGEND

- STEEL PIANO DOOR HINGE
- DOUBLE SPRING ACTION
- SIDE RUNNER 5" ALUM.
- BATTEN 1/8" ALUM.
- DOOR PANEL 1/8" ALUM.
- STEEL ANGLE FRAME
- TREAD (SERRATED ALUM.)
- HANDRAIL RIGHT SIDE ONLY
- EXTRA HEAVY OPERATING ARM
- ADJUSTABLE FOOT
- MIDDLE SECTION
- BOTTOM SECTION
- FOLD-ASSIST


Introducing Our New Disappearing Attic or Roof Access Ladder.

Construction Features:

- Customized to meet most job conditions
- Built to the exact finished ceiling and floor/roof deck heights
- Meets requirements of A.N.S.I. A14.9 for "Commercial" or "Residential" use
- Test weight of 500 Lbs
- Individual tread test weights of 1000 Lbs
- Actual shear of rivets tested to 1175 Lbs
- 11 ga. formed steel frame
- Extruded aluminum treads and side rails
- 5 3/16" tread depth
- Can accommodate ceiling heights up to 13' 6"

Options: (additional cost)

- Units available for both non-rated and fire rated ceilings
- Lock on door panel (std on fire-rated units)
- Special Deep Box and Deep Angle frames to accommodate dropped ceilings
- 2 hour fire-rated Warnock Hersey label that meets ASTM-E-119 and UBC 43-7 requirements, passed 250° temperature rise in the first 30 minutes
- Fold-Assist (std on units 9'-10' and taller)
- For units accessing a roof, custom roof hatches are produced and factory mounted then shipped to the job site as one complete roof access system
- Fire rated
- Non-Fire rated

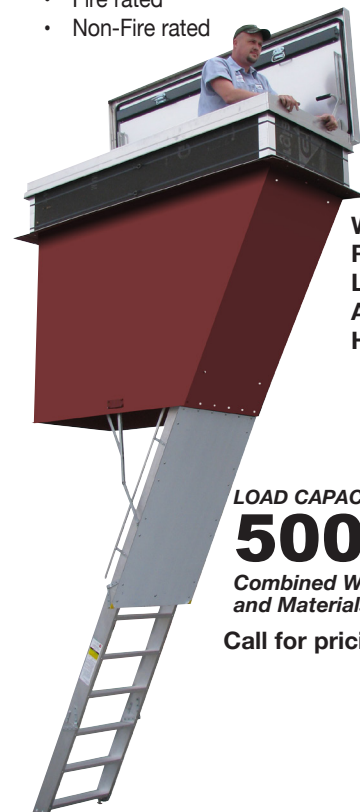

WB Fire Rated Ladder Access Hatch

LOAD CAPACITY:

500lbs.

Combined Weight of User and Materials

Call for pricing.

Project: _____ Date: _____
Contractor: _____ Architect: _____
Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



The World's Largest Access Door Store.™



BuyOnline

WBCA 2022