


**SUBMITTAL SHEET**



**SECTION DETAIL**

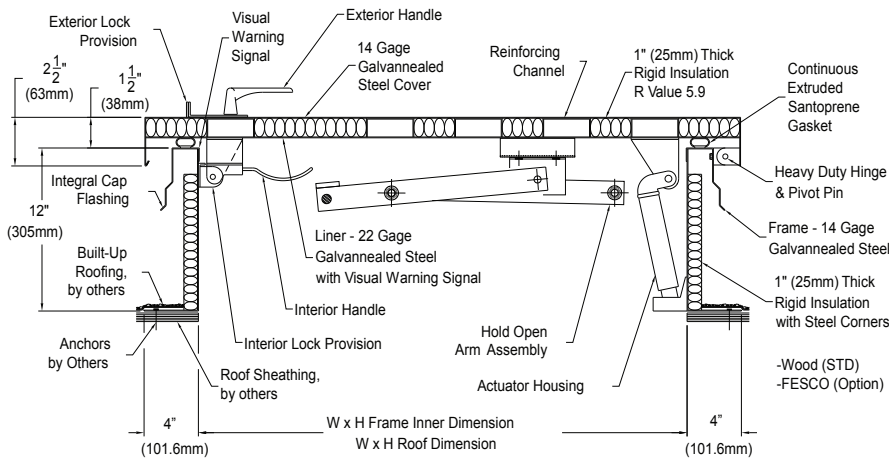

This newly re-designed WB Roof Hatch offers improved features such as a heavy duty lock and handle assembly, heavy gauge, weather-resistant gasket and fully concealed hinge hardware located on the interior making rust unlikely. Pre-lubricated compression springs, encased in zinc-plated telescopic tubes held in place by 3-sided welded brackets. Durable and re-coatable gray primer finish comes standard.

**SPECIFICATIONS:**

- .125 Aluminum
- Durable re-coatable gray primer finish
- Highly visible safety caution striping
- Heavy duty lock and handle
- Weather resistive gasket
- Finest quality and workmanship

**General:** Roof access hatch shall be model WB-RH 30x36 steel manufactured exclusively for The Williams Bros. Corp of America, with a durable, re-coatable gray primer finish. A yellow and black striped visual warning signal shall be on top of curb and on inside of lid.

**Curb Construction:** Aluminum with durable re-coatable gray primer finish standard. Curb shall be 12" (304mm) in height with a 4" (101mm) fiber board insulation, and mounting holes for roof attachment. Curb shall have integral cap flashing of the same material and thickness as the curb. Curb and cap flashing shall be fully welded at the corners for a watertight construction. Hinges are two-piece formed steel, with a non-removable heavy-duty pivot pin.

**Covers:** Cover shall be .125 Aluminum with radius corners for safety, and shall be fully welded at the corners for watertight construction. An extruded rubber gasket, mechanically fastened to the inside of the lid shall cause the hatch lid to seal.

**Hardware:** Hardware shall include interior handle, with a positive, one-point locking mechanism, exterior handle, and provisions for padlock, both inside and out. Pre-lubricated compression springs, encased in zinc-plated telescopic tubes, for smooth and controlled door operation at any position. An automatic, hold-open arm, with vinyl grip, shall be standard. All hardware shall be corrosion resistant, and all fasteners shall be of a self-locking type.

**OPTIONS (at additional cost)**

☐ Special sizes available upon request

✓	Model No.	Door Size W x L	Ship Wt. Lbs.
	WB RH AL	24 x 24	135
	WB RH AL	24 x 30	140
	WB RH AL	24 x 36	145
	WB RH AL	30 x 30	145
	WB RH AL	30 x 54	198
	WB RH AL	30 x 96	450
	WB RH AL	36 x 30	151
	WB RH AL	36 x 36	167
	WB RH AL	36 x 48	255
	WB RH AL	48 x 48	275

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_  
 Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ App Initials: \_\_\_\_\_

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • [www.wbdoors.com](http://www.wbdoors.com)



*The World's Largest Access Door Store.™*

