



SUBMITTAL SHEET



FRONT ELEVATION



SPECIFICATIONS:

Trim, Return, & Door stop: One-Piece steel construction—doors smaller than 18×18 are 22 ga. steel; doors 18×18 and larger are 20 ga. steel

Flange: 1/2" wide and beveled

Latches: Flush screwdriver operated or key operated cylinder lock with automatic dust shutter

Hinges: Concealed continuous piano hinge


Return: Bendable tabs for easy installation into drywall Finish: Prime coated rust inhibitive electrostatic powder, baked white enamell, paintable surface

OPTIONS (at additional cost)

Locking T-handle

- Any lock manufacturer's 1-1/8" mortise cylinder lock
- Non-locking paddle latch
- Special sizes available

~	Model No.	Door Diameter	Rough Opening (In.)	No of Stud Latches	Ship Wt. Lbs.
	WB PF 705	8 x 8	7-13/16 x 7-13/16	1	1.5
	WB PF 705	12 x 12	11-13/16 x 11-13/16	1	2.5
	WB PF 705	14 x 14	13-13/16 x 13-13/16	2	3
	WB PF 705	18 x 18	17-13/16 x 17-13/16	2	4.6
	WB PF 705	24 x 24	23-13/16 x23-13/16	3	7.4

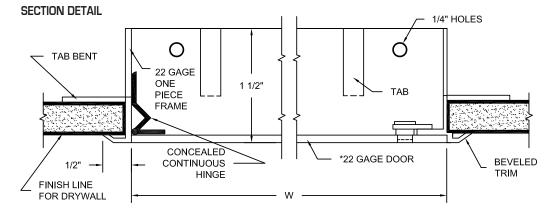

The WB PF Press-Fit door is a unique lightweight door that installs easily by bending the tabs on the return back to grip the drywall. The frame, return and doorstop are one-piece construction with a beveled frame resulting in an attractive finished look.

- 1. When a door increases in size, more cams are added for security
- For requests on clear opening after door installed, please email <u>info@wbdoors.com</u>
- 3. All installation holes must be used for proper door functionality and security
- 4. For custom sizes, please reach out to info@wbdoors.com
- 5. Clear opening may be impeded by structural or functional parts on door
- 6. Drawings of any door can be requested through info@wbdoors.com

Project:			Date:	
Contractor:		_ Architect:		
Sizes:		Quantity:	App Initials:	
1	1330 Progress Drive • Front Royal, VA 22	630 • Phone:	1-800-255-5515 • www.wbdoors.com	



