




RADIO FREQUENCY Shielded Access Doors



WB BASIC 300

- ☞ 18 ga. Steel Door & Trim
- ☞ Primed White Enamel
- ☞ Economical

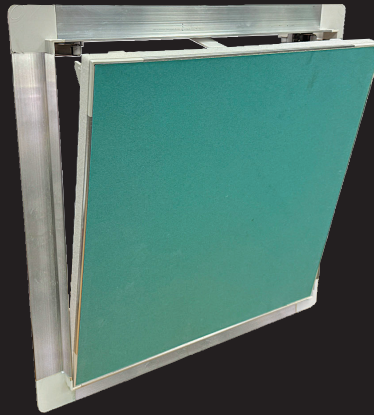


WB DWAL 412-HD

- ☞ Virtually Invisible Touch Latch Door
- ☞ Felt Gasket Four Sides
- ☞ Mold & Mildew Resistant



WB GP 100 PREMIUM

- ☞ Concealed Hinge (up to 24x24)
- ☞ 14 ga. Steel Door
- ☞ Laser Cut One Piece Frame

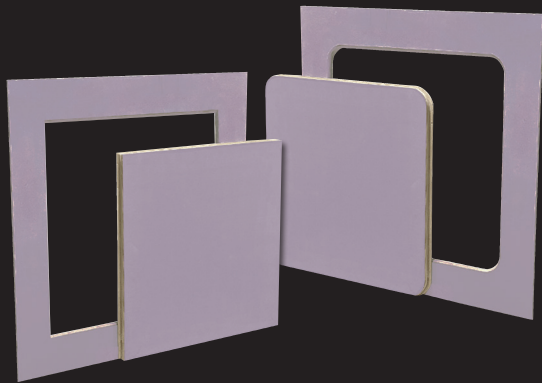

WB DW 405 PHANTOM

- ☞ Patent-pending
- ☞ Fire Rated & Sound Rated
- ☞ Concealed Appearance



WB DC-SS 900

- ☞ 16 ga. Brushed Stainless #304
- ☞ Keyed Paddle Latch w/Interior Release
- ☞ Double Seal Gasket & 2" Insulation

Independently tested by Element Materials Technology Radio Frequency Shielding from 80 MHz to 18 GHz Accordance with ASTM D4935 / IEEE-299 R34651-1 Shielding Effectiveness Ideal Applications:

- ☞ Data Centers
- ☞ Telecommunications Rooms
- ☞ Medical Imaging Environments
- ☞ Secure / SCIF Facilities
- ☞ Laboratories



For Submittals and Test Results Visit Our Website: www.wbdoors.com

The Williams Brothers Corporation of America