


SUBMITTAL SHE

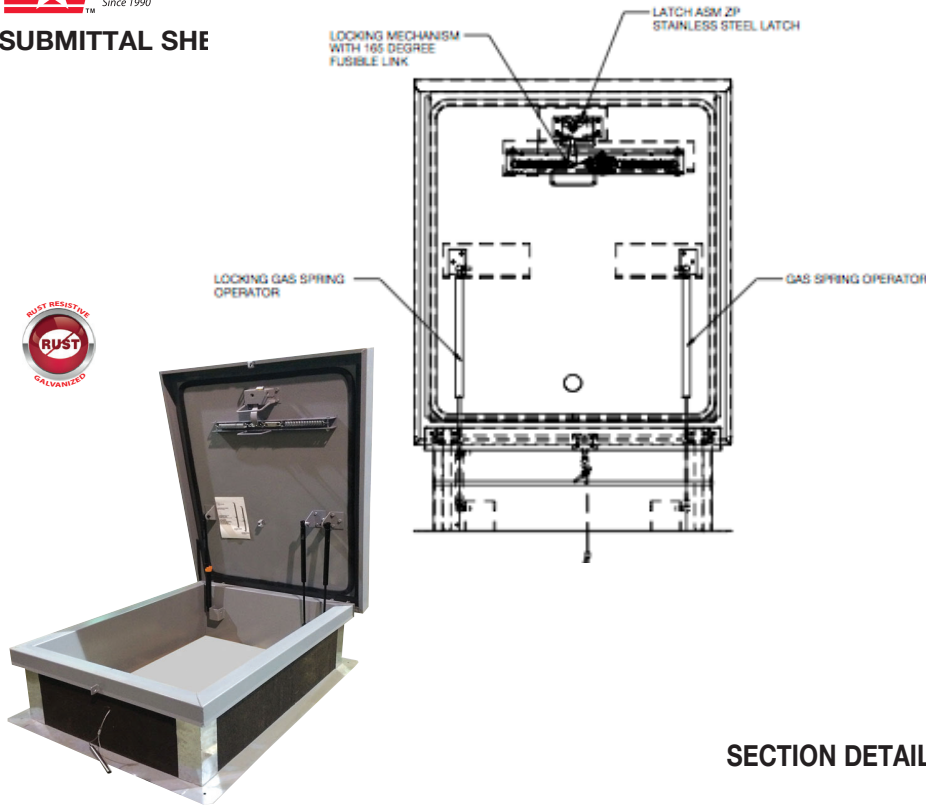

SPECIFICATIONS:

Designed to provide an economical solution for fire ventilation by removing deadly smoke, heat, and gases from a burning building. Single leaf Smoke Vents are used for smaller areas that need venting, including elevator shafts and stairwells. Single leaf units are not U.L. Listed.

- 14 gauge G90 Galvanized Steel
- 12" high insulated curb
- UL Listed Fusible or McCabe Resettable Links
- Inside and Outside manual release
- High performance gas springs

Opening: Gas spring operators allow cover to open and close with ease. Inside and outside release allows for manual lid operation.

Door Latch: Self latching Slam Latch. Supplied standard with 165° UL Listed Fusible Link. Resettable McCabe link available.

Curb: 14 gauge galvanized steel with 1" thick fiber-board roof insulation at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

Hinge: Heavy duty galvanized steel / aluminum pintle hinges with 3/8" pin


Covers: Double-skin construction ("in box type design") with 1" cellulose insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 14 gauge galvanized steel with a 22 gauge galvanized steel inside liner.

Finish: Galvanized Steel: baker on polyester enamel paint

OPTIONS:

- ☐ Curb mount or Metal Building Flange
- ☐ Double-Dome Co-Polyester lids for daylighting
- ☐ Louvered curb for ventilation

SECTION DETAIL

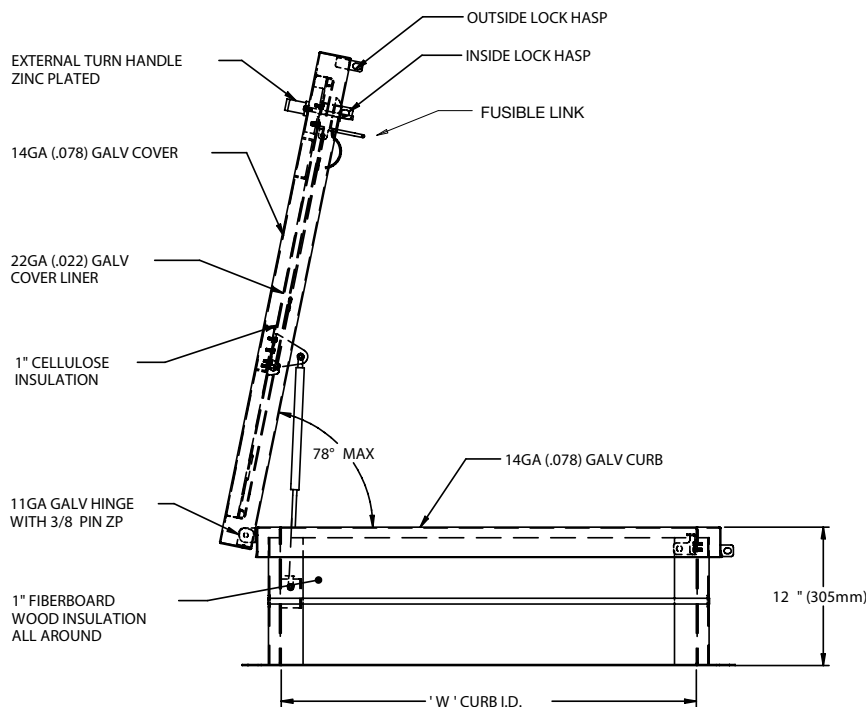

Model No.	Size (inches) W x L	Ship Wt. Lbs.
WB SVG	24 x 24	125
WB SVG	24 x 36	135
WB SVG	30 x 30	140
WB SVG	30 x 36	155
WB SVG	30 x 96	387
WB SVG	36 x 36	170
WB SVG	48 x 48	221

Project: _____ Date: _____
Contractor: _____ Architect: _____
Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



The World's Largest Access Door Store.™



WBCA 2026