


SUBMITTAL SHEET

FRONT ELEVATION

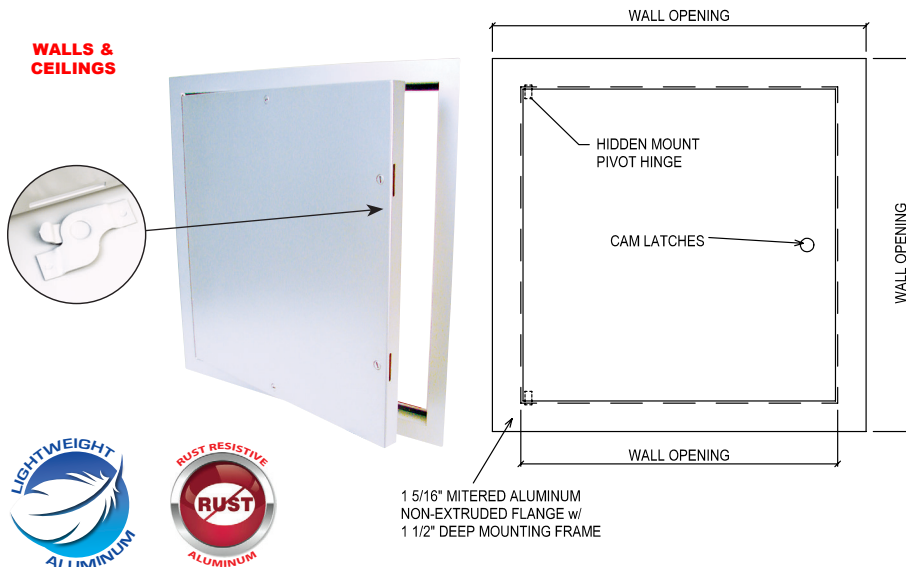


SPECIFICATIONS:

- Door & Trim:** Non-extruded .063 Aluminum
- Finish:** Primed white baked enamel, paintable surface
- Latch:** Flush aluminum cam latch
- Hinge:** Concealed continuous piano type
- Insulation:** 1" TUFF-RTM polyisocyanurate insulation, with 6.5 R-Value at 75° F mean temperature
- Gasket:** Neoprene gasket included on all 4 sides

OPTIONS (at additional cost)

- WB Key Cylinder Locks - keyed alike 2 keys per door

SECTION DETAIL

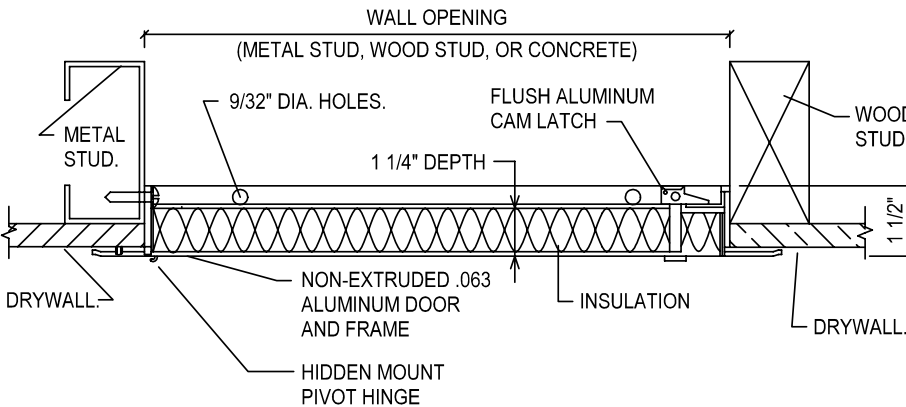

✓	Model No.	Door Size W x H	Wall Opening	Cam Latches	Ship Wt. Lbs.
	AL 1500	6 x 6	6 1/4 x 6 1/4	1	
	AL 1500	8 x 8	8 1/4 x 8 1/4	1	
	AL 1500	8 x 12	8 1/4 x 12 1/4	1	
	AL 1500	8 x 16	8 1/4 x 16 1/4	1	
	AL 1500	10 x 10	10 1/4 x 10 1/4	3	
	AL 1500	12 x 12	12 1/4 x 12 1/4	3	
	AL 1500	12 x 16	12 1/4 x 16 1/4	3	
	AL 1500	12 x 18	12 1/4 x 18 1/4	3	
	AL 1500	12 x 24	12 1/4 x 24 1/4	4	
	AL 1500	14 x 14	14 1/4 x 14 1/4	3	
	AL 1500	14 x 24	14 1/4 x 24 1/4	3	
	AL 1500	16 x 16	16 1/4 x 16 1/4	3	
	AL 1500	16 x 20	16 1/4 x 20 1/4	3	
	AL 1500	16 x 24	16 1/4 x 24 1/4	4	
	AL 1500	18 x 18	18 1/4 x 18 1/4	3	
	AL 1500	18 x 24	18 1/4 x 24 1/4	4	
	AL 1500	18 x 36	18 1/4 x 36 1/4	5	
	AL 1500	20 x 20	20 1/4 x 20 1/4	3	
	AL 1500	20 x 24	20 1/4 x 24 1/4	4	
	AL 1500	20 x 30	20 1/4 x 30 1/4	4	
	AL 1500	22 x 22	22 1/4 x 22 1/4	4	
	AL 1500	22 x 24	22 1/4 x 24 1/4	4	
	AL 1500	22 x 30	22 1/4 x 30 1/4	4	
	AL 1500	22 x 36	22 1/4 x 36 1/4	5	
	AL 1500	24 x 24	24 1/4 x 24 1/4	4	
	AL 1500	24 x 30	24 1/4 x 30 1/4	4	
	AL 1500	24 x 36	24 1/4 x 36 1/4	5	
	AL 1500	24 x 48	24 1/4 x 48 1/4	6	
	AL 1500	30 x 30	30 1/4 x 30 1/4	6	
	AL 1500	30 x 36	30 1/4 x 36 1/4	6	
	AL 1500	32 x 32	32 1/4 x 32 1/4	6	
	AL 1500	36 x 36	36 1/4 x 36 1/4	7	
	AL 1500	36 x 48	36 1/4 x 48 1/4	8	
	AL 1500	48 x 48	48 1/4 x 48 1/4	12	

This lightweight, insulated, all aluminum access door is ideal for exterior applications, and also those specific interior applications where corrosion or moisture is a concern. Access to large openings in walls and ceilings is made easy. The non-extruded door frame has the same visual aesthetic design as the GP 100 Series door. Comes with gasket on all 4 sides. The aluminum door panel is insulated with 1" TUFF-RTM polyisocyanurate.

Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



Family Owned & Operated
 Since 1990



BuyOnline
 WBCA 2019