


SUBMITTAL SHEET



FRONT ELEVATION

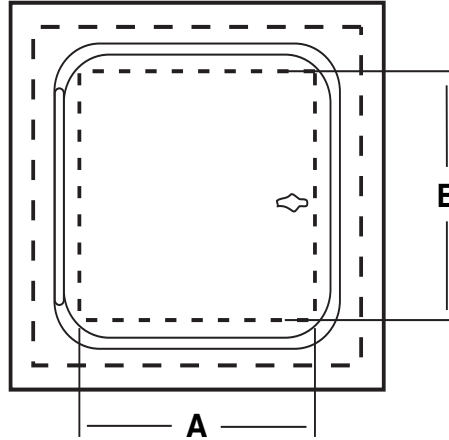

SPECIFICATIONS:

- Door: 16 ga. Stainless Steel Type 304 No. 4
- Trim: 16 ga. Stainless Steel Type 304 No. 4
- Finish: Satin Finish Brushed
- Latches: Knurled knob lock w/ 1 Flush key
- Hinge: Fully concealed, pivot rod type hinge. Allows opening to 140°
- Insulation: 2" thick mineral wool (ROXUL) in between two pieces of 22 ga. steel
- Ceiling Installation: To comply with current fire regulations, largest size acceptable is 24" x 48"




OPTIONS (at additional cost)

- Finishes:**
- Stainless Steel Type 304 No. 4 Satin Finish Brushed
 - Stainless Steel Type 316 No. 4 Satin Finish Brushed
- Options: (additional cost)**
- Mortise Best Lock or locks by others
 - Hot Smoke Seal gasket all 4 sides**
 - Special sizes available
 -

SECTION DETAIL

Fire-rated access door for ceiling installation for 1 hr only.

This fire-rated door can be used wherever it is necessary to provide service access to shafts and any other location which must have a fire rating. Approved ceiling use.

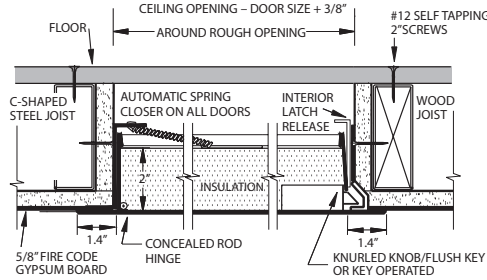

Re-designed and approved by Warnock Hersey International to current 2017 fire code standards. W/IN21472.

NOTE: For fire-rated ceiling access doors, on size 16" x 16" and larger, extra spring supplied with door must be attached from back of door pan to framing or floor above. In horizontal (ceiling) applications door has self-assisted closing.

Model No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
FR 800	8 x 8	8 1/4 x 8 1/4	1	8
FR 800	10 x 10	10 1/4 x 10 1/4	1	10
FR 800	12 x 12	12 1/4 x 12 1/4	1	12
FR 800	12 x 18	12 1/4 x 18 1/4	1	16
FR 800	12 x 24	12 1/4 x 24 1/4	1	19
FR 800	14 x 14	14 1/4 x 14 1/4	1	14
FR 800	16 x 16	16 1/4 x 16 1/4	1	17
FR 800	18 x 18	18 1/4 x 18 1/4	1	21
FR 800	18 x 24	18 1/4 x 24 1/4	1	26
FR 800	20 x 20	20 1/4 x 20 1/4	1	24
FR 800	20 x 24	20 1/4 x 24 1/4	1	30
FR 800	20 x 30	20 1/4 x 30 1/4	1	37
FR 800	22 x 22	22 1/4 x 22 1/4	1	28
FR 800	22 x 24	22 1/4 x 24 1/4	1	29
FR 800	22 x 30	22 1/4 x 30 1/4	2	39
FR 800	22 x 36	22 1/4 x 36 1/4	2	47
FR 800	24 x 24	24 1/4 x 24 1/4	1	32
FR 800	24 x 30	24 1/4 x 30 1/4	2	43
FR 800	24 x 36	24 1/4 x 36 1/4	2	48
FR 800	24 x 48	24 1/4 x 48 1/4	2	62
FR 800	30 x 30*	30 1/4 x 30 1/4	2	48
FR 800	32 x 32*	32 1/4 x 32 1/4	2	55
FR 800	36 x 36*	36 1/4 x 36 1/4	2	67
FR 800	36 x 48*	36 1/4 x 48 1/4	2	88
FR 800	48 x 48*	48 1/4 x 48 1/4	2	104

* Wall installation only

RELATED PRODUCTS

WB FRU 810 Ultra Series Fire-Rated



Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com

