



**SUBMITTAL SHEET**

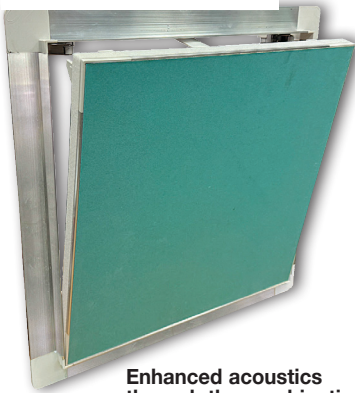



Enhanced acoustics through the combination of a gasket and the mass of GWB in the door

**WALLS & CEILINGS**


**FRONT ELEVATION**

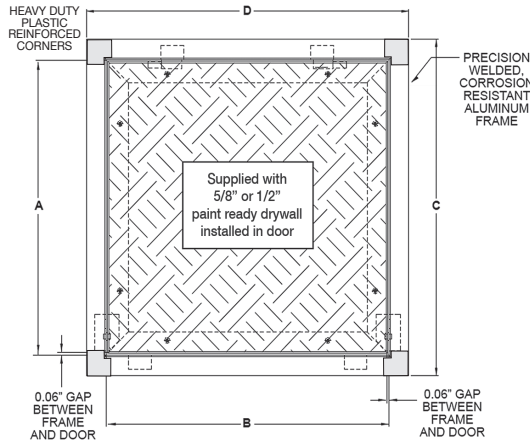


**SECTION DETAIL**

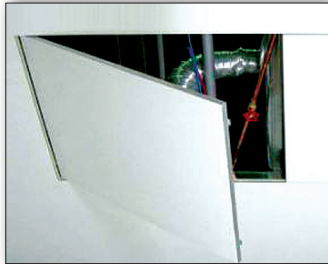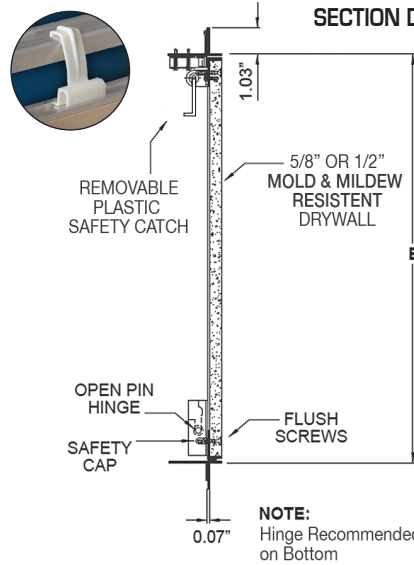

Installed door – virtually invisible

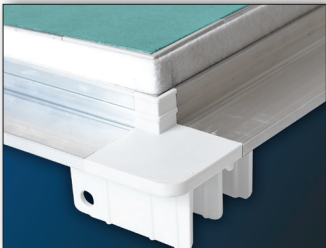

Heavy duty reinforced plastic corners ensures flush installation and felt gasket surrounds perimeter of door to help prevent air & noise transmission

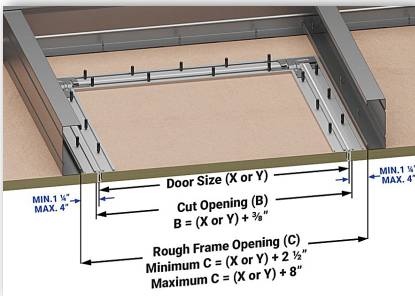

**STC-62**



**NOW SOUND TESTED!**

- The **WB DWAL 412 HD Series Access Door** has been officially tested for sound performance, delivering verified acoustic protection.
- **Certified Noise Reduction:** Engineered to meet industry standards, ensuring effective sound control.
- **Proven Acoustic Performance:** Laboratory tested to minimize noise transfer for quieter spaces.
- **Sound-Sensitive Applications:** Perfect for commercial buildings, hospitals, hotels, and high-end residential projects.
- **Heavy-Duty Durability with Acoustic Benefits:** The DWAL 412 HD Series now combines robust construction with tested and certified sound performance.

**SPECIFICATIONS:**

**Frame:** A welded aluminium frame available with or without 1/2" or 5/8" mold & mildew resistant drywall  
Outer and inner frame assembly consists of high grade aluminium bonded with heavy duty plastic corners to ensure flush install

**Shipping Security:** Ships with a safety-system to prevent accidental opening

**Reveal:** 1/16" is visible between the outer frame and door hatch for concealed appearance

**Latches:** Concealed heavy duty touch latches open when pressure is applied to the spring loaded latch side

**Gasket:** Felt gasket on all 4 sides to provide air & temperature control

**Acoustics:** Gasket and mass of drywall door provide reduced sound transmission

**Standard Features:**

- Fast shipping with large inventory
- Easy & clean install
- Solid aluminium frame with reinforced plastic corners
- Felt gasket installed on all 4 sides, virtually invisible when installed
- Flush installation in ceilings and walls
- Moisture & mildew resistant drywall
- Paint ready – no screw holes

**OPTIONS (AT ADDITIONAL COST)**

- ☐ Custom sizes available
- ☐ WB Key Cylinder Locks - keyed alike 2 keys per door

✓	Model No.	Door Size (X or Y)	Cut Opening (B)	Min Rough Framed Opening (C)	Ship Wt. Lbs.
	DWAL 412-HD	6 x 6	6 3/8 x 6 3/8	8 1/2 x 8 1/2	10
	DWAL 412-HD	8 x 8	8 3/8 x 8 3/8	10 1/2 x 10 1/2	12
	DWAL 412-HD	10 x 10	10 3/8 x 10 3/8	12 1/2 x 12 1/2	13
	DWAL 412-HD	12 x 12	12 3/8 x 12 3/8	14 1/2 x 14 1/2	14
	DWAL 412-HD	12 x 24	12 3/8 x 24 3/8	14 1/2 x 26 1/2	15
	DWAL 412-HD	14 x 14	14 3/8 x 14 3/8	16 1/2 x 16 1/2	16
	DWAL 412-HD	14 x 24	14 3/8 x 24 3/8	16 1/2 x 26 1/2	24
	DWAL 412-HD	16 x 16	16 3/8 x 16 3/8	18 1/2 x 18 1/2	17
	DWAL 412-HD	16 x 24	16 3/8 x 24 3/8	18 1/2 x 26 1/2	24
	DWAL 412-HD	18 x 18	18 3/8 x 18 3/8	20 1/2 x 20 1/2	19
	DWAL 412-HD	18 x 24	18 3/8 x 24 3/8	20 1/2 x 26 1/2	26
	DWAL 412-HD	20 x 20	20 3/8 x 20 3/8	22 1/2 x 22 1/2	25
	DWAL 412-HD	22 x 22	22 3/8 x 22 3/8	24 1/2 x 24 1/2	26
	DWAL 412-HD	22 x 30	22 3/8 x 30 3/8	24 1/2 x 32 1/2	30
	DWAL 412-HD	22 x 32	22 3/8 x 32 3/8	24 1/2 x 34 1/2	37
	DWAL 412-HD	22 x 36	22 3/8 x 36 3/8	24 1/2 x 38 1/2	38
	DWAL 412-HD	24 x 24	24 3/8 x 24 3/8	26 1/2 x 26 1/2	34
	DWAL 412-HD	24 x 36	24 3/8 x 36 3/8	26 1/2 x 38 1/2	41
	DWAL 412-HD	24 x 48	24 3/8 x 48 3/8	26 1/2 x 50 1/2	55
	DWAL 412-HD	30 x 30	30 3/8 x 30 3/8	32 1/2 x 32 1/2	50
	DWAL 412-HD	32 x 32	32 3/8 x 32 3/8	34 1/2 x 34 1/2	52
	DWAL 412-HD	36 x 36	36 3/8 x 36 3/8	38 1/2 x 38 1/2	60

Custom sizes available upon request.

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_  
Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ App Initials: \_\_\_\_\_

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • [www.wbdoors.com](http://www.wbdoors.com)



*The World's Largest Access Door Store.™*

